



PLL Module - Lattice Radiant Software

User Guide

FPGA-IPUG-02063-1.0

December 2019

Disclaimers

Lattice makes no warranty, representation, or guarantee regarding the accuracy of information contained in this document or the suitability of its products for any particular purpose. All information herein is provided AS IS and with all faults, and all risk associated with such information is entirely with Buyer. Buyer shall not rely on any data and performance specifications or parameters provided herein. Products sold by Lattice have been subject to limited testing and it is the Buyer's responsibility to independently determine the suitability of any products and to test and verify the same. No Lattice products should be used in conjunction with mission- or safety-critical or any other application in which the failure of Lattice's product could create a situation where personal injury, death, severe property or environmental damage may occur. The information provided in this document is proprietary to Lattice Semiconductor, and Lattice reserves the right to make any changes to the information in this document or to any products at any time without notice.

Acronyms in This Document

A list of acronyms used in this document.

Acronym	Definition
FPGA	Field Programmable Gate Array
IP	Intellectual Property
LMMI	Lattice Memory Mapped Interface
APB	Advanced Peripheral Bus
SSC	Spread Spectrum Clock

Contents

Acronyms in This Document	3
1. Introduction	6
1.1. Quick Facts	6
1.2. Features.....	6
1.3. Conventions.....	7
1.3.1. Nomenclature.....	7
1.3.2. Signal Names	7
1.3.3. Attribute Names	7
2. Functional Description.....	8
2.1. Overview	8
2.2. Signal Description.....	9
2.3. Attribute Summary.....	11
3. IP Generation and Evaluation	14
3.1. Licensing the IP.....	14
3.2. Generating and Synthesizing the IP.....	14
3.3. Running the Functional Simulation	16
3.4. Hardware Evaluation	18
Appendix A. Limitations	19
References	20
Technical Support Assistance	21
Revision History	22

Figures

Figure 2.1. GPLL Top Level Block Diagram	8
Figure 3.1. Configure Module/IP Block Wizard.....	14
Figure 3.2. Configure User Interface of PLL Module.....	15
Figure 3.3. Check Generating Result.....	15
Figure 3.4. Simulation Wizard.....	17
Figure 3.5. Adding and Reordering Source	17
Figure 3.6. Simulation Waveform	18

Tables

Table 1.1. Quick Facts	6
Table 2.1. PLL Module Signal Description.....	9
Table 2.2. Attributes Table	11
Table 3.1. Generated File List	16

1. Introduction

The Phase Locked Loop (PLL) Module is capable of frequency synthesis and clock phase management including clock injection delay cancellation. It has the flexibility of input and feedback source selections, multiple output selections, VCO phase rotation, and independent phase shifting features. The multiple output clocks can be synchronized with the option to enable or be individually controlled dynamically by users.

1.1. Quick Facts

Table 1.1 presents a summary of the PLL Module.

Table 1.1. Quick Facts

IP Requirements	Supported FPGA Family	CrossLink-NX™
	Minimal Device Needed	LIFCL-40
Resource Utilization	Targeted Device	LIFCL-40
	Supported User Interfaces	LMMI (Lattice Memory Mapped Interface), APB
Design Tool Support	Lattice Implementation	Lattice Radiant® Design Suite 2.0
	Synthesis	Lattice Synthesis Engine (LSE)
		Synopsys® Synplify Pro® for Lattice
Simulation	For the list of supported simulators, see the Lattice Radiant Software 2.0 User Guide .	

1.2. Features

The key features of the PLL Module include:

- Multiple feedback inputs
- Multiple output clocks
- Output synchronization
- Lock detector – Phase and Frequency
- M (1 to 128), N (1 to 128) input and feedback dividers
- VCO phase shift – 8 VCO phases
- Divider phase shift
- Dynamic VCO and divider phase shift
- Output dividers (1 to 128)
- Output edge trim for clkop_o and clkos_o only
- Input bypass
- Power down mode
- Test mode
- Programmable bandwidth

1.3. Conventions

1.3.1. Nomenclature

The nomenclature used in this document is based on Verilog HDL.

1.3.2. Signal Names

Signal names that end with:

- *_n* are active low
- *_i* are input signals
- *_o* are output signals

1.3.3. Attribute Names

Attribute names in this document are formatted in title case and italicized (*Attribute Name*).

2. Functional Description

2.1. Overview

The PLL Module is capable of clock synthesis and clock phase management including clock tree delay cancellation. The PLL Module performs frequency synthesis, multiplication, division, and clock injection delay removal. For clock synthesis application where removal of clock injection delay is not a requirement, the GPLL block has an internal feedback path that is used to complete the feedback loop. Applications that require the removal of the clock injection delay take the feedback clock from the output of the relevant clock tree.

A top-level block diagram of the Global Phase Locked Loop Module is shown in [Figure 2.1](#).

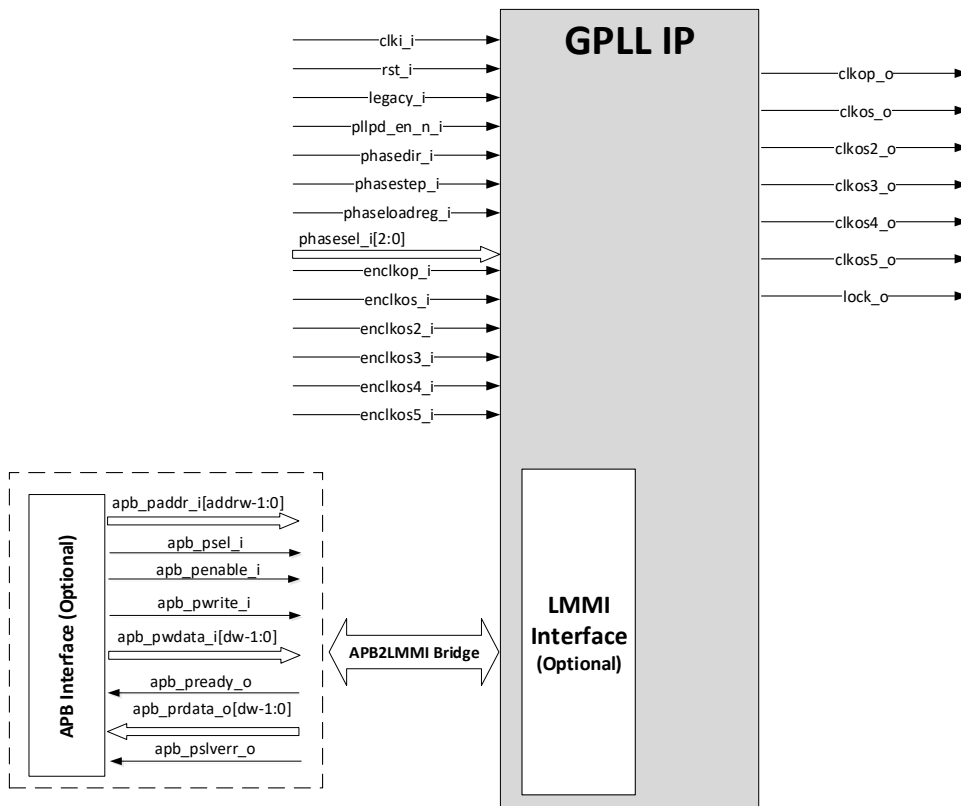


Figure 2.1. GPLL Top Level Block Diagram

This PLL Module has the flexibility of multiple feedback clock source selections. It has main logic features as 6 independent output clocks, output phase shifting through VCO phases, synchronous outputs, and divider phase shifts. The effective feedback divider value cannot exceed 80.

2.2. Signal Description

Table 2.1. PLL Module Signal Description

Port Name	I/O	Width	Description
Clock and Reset			
clki_i	In	1	System clock.
rst_i	In	1	PLL reset signal enabled by user from the user interface via <i>PLL Reset Options: Provide PLL Reset</i>
clkop_o	Out	1	Primary output clock, always enabled
clkos_o	Out	1	Secondary output clock, enabled by user from the user interface via <i>CLKOS: Enable</i>
clkos2_o	Out	1	Secondary output clock, enabled by user from the user interface via <i>CLKOS2: Enable</i>
clkos3_o	Out	1	Secondary output clock, enabled by user from the user interface via <i>CLKOS3: Enable</i>
clkos4_o	Out	1	Secondary output clock, enabled by user from the user interface via <i>CLKOS4: Enable</i>
clkos5_o	Out	1	Secondary output clock, enabled by user from the user interface via <i>CLKOS5: Enable</i>
User Interface			
legacy_i	In	1	PLL Legacy mode signal enabled by user from the user interface via <i>Power Mode Settings: Enable Legacy Mode</i>
pllpd_en_n_i	In	1	Power Down mode signal enabled by user from the user interface via <i>Power Mode Settings: Enable Power Down Mode</i>
phasedir_i	In	1	Dynamic Phase direction signal enabled by user from the user interface via <i>Optional Port Selections: Dynamic Phase Ports</i>
phastep_i	In	1	Dynamic Phase step signal enabled by user from the user interface via <i>Optional Port Selections: Dynamic Phase Ports</i>
phaseloadreg_i	In	1	Dynamic Phase load signal enabled by user from the user interface via <i>Optional Port Selections: Dynamic Phase Ports" attribute</i>
phasesel_i	In	3	Dynamic Phase select signal enabled by user from the user interface via <i>Optional Port Selections: Dynamic Phase Ports</i> 3'b000: CLKOS 3'b001: CLKOS2 3'b010: CLKOS3 3'b011: CLKOS4 3'b100: CLKOS5 3'b101: CLKOP
enclkop_i	In	1	CLKOP Enable signal, enabled by user from the user interface via <i>Optional Port Selections: Clock Enable Ports</i> to populate displayed ports for CLKOP
enclkos_i	In	1	CLKOS Enable signal, enabled by user from the user interface via <i>Optional Port Selections: Clock Enable Ports</i> to populate displayed ports for CLKOS
enclkos2_i	In	1	CLKOS2 Enable signal, enabled by user from the user interface via <i>Optional Port Selections: Clock Enable Ports</i> to populate displayed ports for CLKOS2
enclkos3_i	In	1	CLKOS3 Enable signal, enabled by user from the user interface via <i>Optional Port Selections: Clock Enable Ports</i> to populate displayed ports for CLKOS3
enclkos4_i	In	1	CLKOS4 Enable signal, enabled by user from the user interface via <i>Optional Port Selections: Clock Enable Ports</i> to populate displayed ports for CLKOS4
enclkos5_i	In	1	CLKOS5 Enable signal, enabled by user from the user interface via <i>Optional Port Selections: Clock Enable Ports</i> to populate displayed ports for CLKOS5
lock_o	Out	1	PLL lock signal enabled by user from the user interface via <i>Lock Settings: Provide PLL Lock Signal</i>

Port Name	I/O	Width	Description
LMMI Interface¹			
lmmi_clk_i	In	1	LMMI Clock
lmmi_resetrn_i	In	1	Reset (active low) Resets the LMM interface and sets registers to their default values. Does not reset the internals of the Hard IP block.
lmmi_request_i	In	1	Start transaction
lmmi_wr_rdn_i	In	1	Write = HIGH, Read = LOW
lmmi_offset_i	In	7	Offset (0-31 bits) – register offset within the slave, starting at offset 0. Bit width is hard IP dependent.
lmmi_wdata_i	In	8	Write data (0-16 bits) Bit width is hard IP dependent.
lmmi_rdata_o	Out	8	Read data (0-16 bits) Bit width is hard IP dependent.
lmmi_rdata_valid_o	Out	1	Read transaction is complete and lmmi_rdata_o[] contains valid data.
lmmi_ready_o	Out	1	Slave is ready to start a new transaction. Slave can insert wait states by holding this signal low. This signal is optional in hardware and mandatory in RTL soft wrappers. Hardware slaves may omit this signal if they do not need wait states. For zero-wait-state slaves, the soft wrapper ties this signal high.
APB Interface¹			
apb_paddr_i	In	7	APB Address signal
apb_psel_i	In	1	APB Select signal
apb_penable_i	In	1	APB Enable signal
apb_pwrite_i	In	1	APB Direction signal
apb_pwdata_i	In	8	APB Write Data signal
apb_pready_o	Out	1	APB Ready signal
apb_prdata_o	Out	8	APB Read Data signal
apb_pslverr_o	Out	1	APB Slave Error signal

Notes:

1. Only one of the three interfaces is available as selected by Interface attribute.
2. The bit width of some signals is set by the attribute. Refer to [Table 2.2](#) for the description of these attributes.

2.3. Attribute Summary

The configurable attributes of the PLL Module are shown in [Table 2.2](#). The attributes can be configured through the IP Catalog's Module/IP wizard of the Lattice Radiant Software.

Table 2.2. Attributes Table

Attribute	Selectable Values	Default	Dependency on Other Attributes
General			
Mode	Frequency, Divider	Frequency	—
CLKI: Frequency (MHz)	10 – 800	100	—
PLL Reference Clock from Pin	Checked, Unchecked	Unchecked	—
I/O Standard for Reference Clock	Legal Configuration Table for LIFCL	LVDS	Active if <i>PLL Reference Clock from Pin</i> == Checked
CLKI: Divider Desired Value	1 to 128	1	Active if <i>Mode</i> == Divider
CLKI: Divider Actual Value	None	N/A	—
CLKFB: Feedback Mode	CLKOP, CLKOS, CLKOS2, CLKOS3, CLKOS4, CLKOS5, INT_CLKOP, INT_CLKOS, INT_CLKOS2, INT_CLKOS3, INT_CLKOS4, INT_CLKOS5	CLKOP	Populates Selectable Values per <i>CLKOS[n]: Enable</i>
CLKFB: FBK Divider Desired Value	1 to 128	1	Active if <i>Mode</i> = Divider
CLKFB: FBK Divider Actual Value	Calculated	N/A	—
VCO Frequency	Calculated	N/A	—
CLKOS: Enable	Checked, Unchecked	Unchecked	—
CLKOS: Bypass	Checked, Unchecked	Unchecked	Active if all of the following conditions are true: <ul style="list-style-type: none"> • CLKFB Modifier: Fractional-N Enable == Unchecked • CLKFB Modifier: Spread Spectrum Enable == Unchecked • CLKOS: Enable == Checked • CLKFB: Feedback Mode != CLKOS • CLKFB: Feedback Mode != INT_CLKOS
CLKOS: Frequency Desired Value (MHz)	6.3499999999999996 – 800 MHz	100	Active if all of the following conditions are true: <ul style="list-style-type: none"> • CLKOS: Enable == Checked • CLKOS: Bypass == Unchecked • Mode == Frequency Mode
CLKOS: Tolerance (%)	0, 0.1, 0.2, 0.5, 1, 2, 5, 10	0.0	Active if all of the following conditions are true: <ul style="list-style-type: none"> • CLKFB Modifier: Fractional-N Enable == Unchecked • CLKFB Modifier: Spread Spectrum Enable == Unchecked • CLKOS: Enable == Checked • CLKOS: Bypass == Unchecked • Mode == Frequency Mode
CLKOS: Divider Actual Value	Calculated	N/A	—
CLKOS: Frequency Actual Value (MHz)	Calculated	N/A	—
CLKOS: ERROR (PPM)	None	0	The difference between desired and actual frequencies in Fractional N mode.

Attribute	Selectable Values	Default	Dependency on Other Attributes
CLKOS: Divider Desired Value	1 to 128	8	Active if all of the following conditions are true: <ul style="list-style-type: none"> • CLKOS: Enable == Checked • CLKOS: Bypass == Unchecked • Mode == Divider Mode
CLKOS: Enable Trim for CLKOS	Checked, Unchecked	Unchecked	Active if all of the following conditions are true: <ul style="list-style-type: none"> • CLKFB Modifier: Fractional-N Enable == Unchecked • CLKFB Modifier: Spread Spectrum Enable == Unchecked • CLKOS: Bypass == Unchecked • CLKOS: Enable == Checked • CLKFB: Feedback Mode != CLKOS • CLKFB: Feedback Mode != INT_CLKOS
CLKOS: Duty Trim Options Mode	Rising, Falling	Falling	Active if all of the following conditions are true: <ul style="list-style-type: none"> • CLKOS: Enable == Checked • CLKOS: Bypass == Unchecked
CLKOS: Duty Trim Options Delay Multiplier	0, 1, 2, 4	0	Active if all of the following conditions are true: <ul style="list-style-type: none"> • CLKOS: Enable == Checked • CLKOS: Bypass == Unchecked
Phase			
CLKOS: Static Phase Shift Desired Degrees	0 - 360	0	Active if all of the following conditions are true: <ul style="list-style-type: none"> • CLKFB Modifier: Fractional-N Enable == Unchecked • CLKFB Modifier: Spread Spectrum Enable == Unchecked • CLKOS: Bypass == Unchecked • CLKOS: Enable == Checked • CLKFB: FBK Mode != CLKOS • CLKFB: FBK Mode != INT_CLKOS
CLKOS: Static Phase Shift Actual Degrees	Calculated	N/A	—
Optional Ports			
Optional Port Selection: Dynamic Phase Ports	Checked, Unchecked	Unchecked	—
Optional Port Selection: CLOCKOP/CLKOS[n] Enable Ports	Checked, Unchecked	Unchecked	Active if all of the following conditions are true: <ul style="list-style-type: none"> • Bypass == Unchecked • CLKOP/CLKOS[n]: Enable == Checked • CLKFB: Feedback Mode is NOT set to this particular clock (incl. INT Clock)
PLL Reset Options: Provide PLL Reset	Checked, Unchecked	Unchecked	—
Lock Settings: Provide PLL Lock Signal	Checked, Unchecked	Unchecked	—
Lock Settings: PLL Lock is Sticky	Checked, Unchecked	Unchecked	Active if PLL Lock Signal == Checked
LMMI Interface: Provide LMMI Port	Checked, Unchecked	Unchecked	Active if APB Interface: Provide APB Port == Unchecked
APB Interface: Provide APB Port	Checked, Unchecked	Unchecked	Active if LMMI Interface: Provide LMMI Port == Unchecked

Attribute	Selectable Values	Default	Dependency on Other Attributes
Power Mode Settings: Enable Legacy Mode	Checked, Unchecked	Unchecked	—
Power Mode Settings: Enable Power Down Mode	Checked, Unchecked	Unchecked	—
Analog Settings			
Operating Voltage	1 V, 0.9 V	1 V	—
BW Factor	5-30	5	—

3. IP Generation and Evaluation

This section provides information on how to generate the PLL Module using the Lattice Radiant Software and how to run simulation and synthesis. For more details on the Lattice Radiant Software refer, refer to the the [Lattice Radiant Software 2.0 User Guide](#) and [Lattice Radiant Software 2.0 Tutorial](#).

3.1. Licensing the IP

No license is required for this IP module.

3.2. Generating and Synthesizing the IP

Lattice Radiant Software allows you to generate and customize modules and IPs and integrate them into the device architecture.

To generate PLL Module:

1. Create a new Lattice Radiant Software project or open an existing project.
2. In the **IP Catalog** tab, double-click on **PLL** under **Module, Architecture_Modules** category. The **Module/IP Block Wizard** opens as shown in [Figure 3.1](#). Enter values in the **Instance name** and the **Create in** fields and click **Next**.

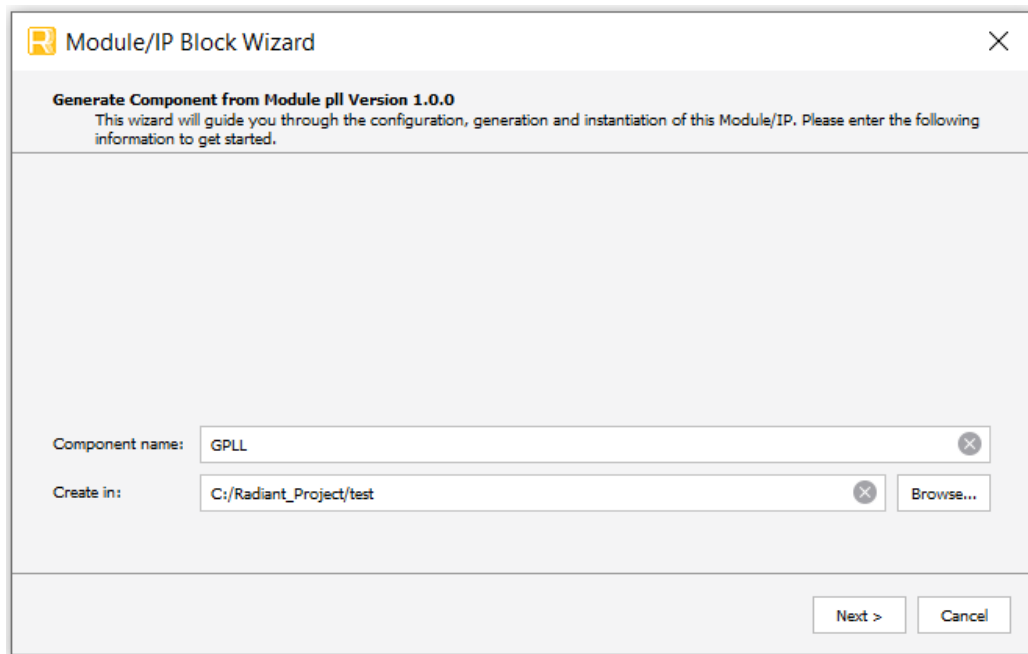


Figure 3.1. Configure Module/IP Block Wizard

3. In the module's dialog box of the **Module/IP Block Wizard** window, customize the selected PLL Module using drop-down menus and check boxes. As a sample configuration, see [Figure 3.2](#). For configuration options, see the [Attributes](#) section.

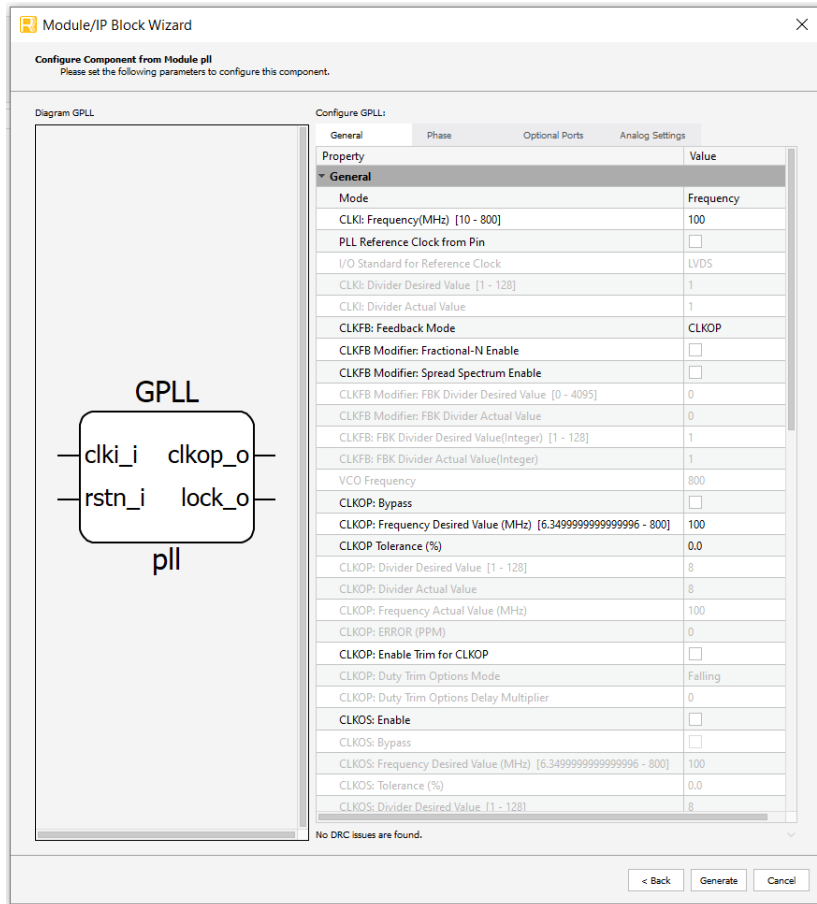


Figure 3.2. Configure User Interface of PLL Module

4. Click **Generate**. The **Check Generating Result** dialog box opens, showing design block messages and results as shown in Figure 3.3.

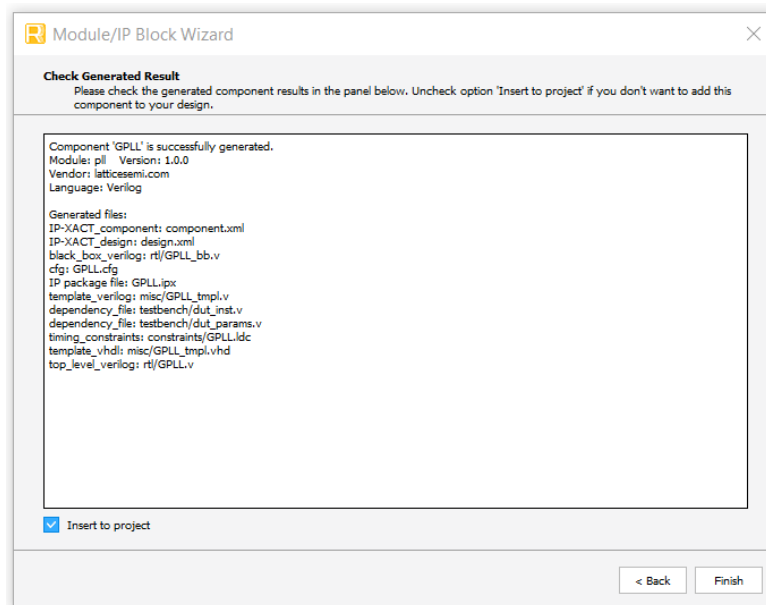


Figure 3.3. Check Generating Result

- Click **Finish**. All the generated files are placed under the directory paths in the **Create in** and the **Instance name** fields shown in [Figure 3.1](#).

The generated PLL Module package includes the black box (<Instance Name>_bb.v) and instance templates (<Instance Name>_tpl.v/vhd) that can be used to instantiate the module in a top-level design. An example RTL top-level reference source file (<Instance Name>.v) that can be used as an instantiation template for the module is also provided. You may also use this top-level reference as the starting template for the top-level for their complete design. The generated files are listed in [Table 3.1](#).

Table 3.1. Generated File List

Attribute	Description
<Instance Name>.ipx	This file contains the information on the files associated to the generated IP.
<Instance Name>.cfg	This file contains the attribute values used in IP configuration.
component.xml	Contains the ipxact:component information of the IP.
design.xml	Documents the configuration attributes of the IP in IP-XACT 2014 format.
rtl/<Instance Name>.v	This file provides an example RTL top file that instantiates the module.
rtl/<Instance Name>_bb.v	This file provides the synthesis black box.
misc/<Instance Name>_tpl.v misc /<Instance Name>_tpl.vhd	These files provide instance templates for the module.


3.3. Running the Functional Simulation

Running functional simulation can be performed after the IP is generated and the testbench is added. For this module, a customer testbench is provided.

To add the generated testbench:

- Go to **File List** tab, right click **Input Files**.
- Click **Add > Existing File**.
- A window appears. Open the instance folder **testbench**, then double-click **tb_top.v**.
- Right-click the **tb_top.v** under **Input files** folder.
- Choose **Include for > Simulation**.

To run the simulation:

- Click  button located on the **Toolbar** to initiate **Simulation Wizard**, as shown in [Figure 3.4](#).

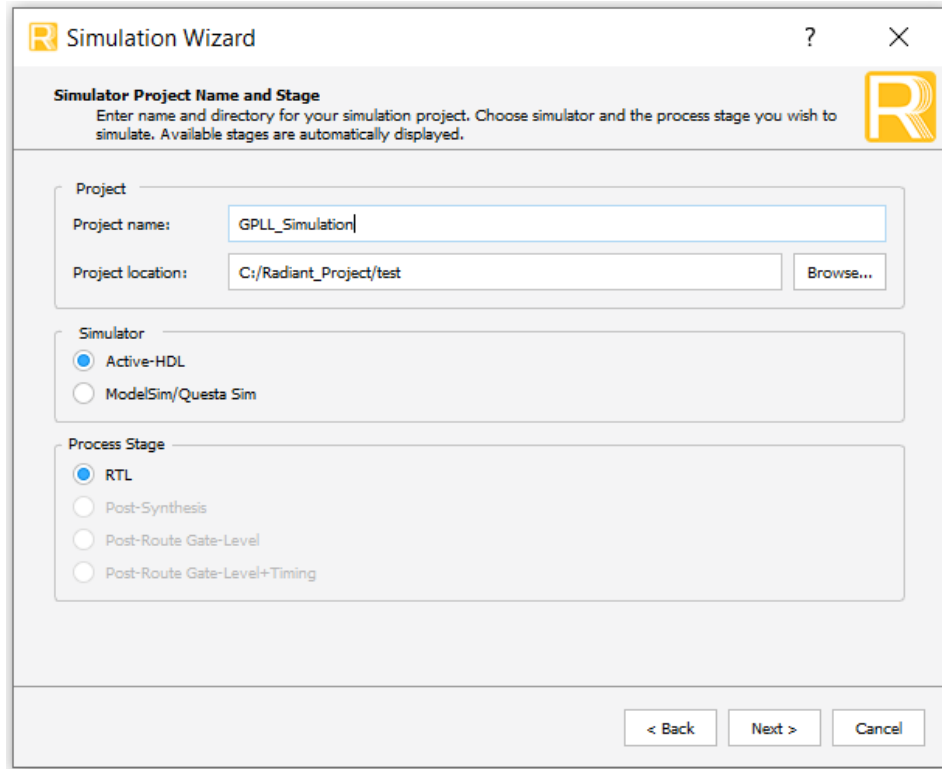


Figure 3.4. Simulation Wizard

2. Click **Next** to open the **Add and Reorder Source** window as shown in [Figure 3.5](#).

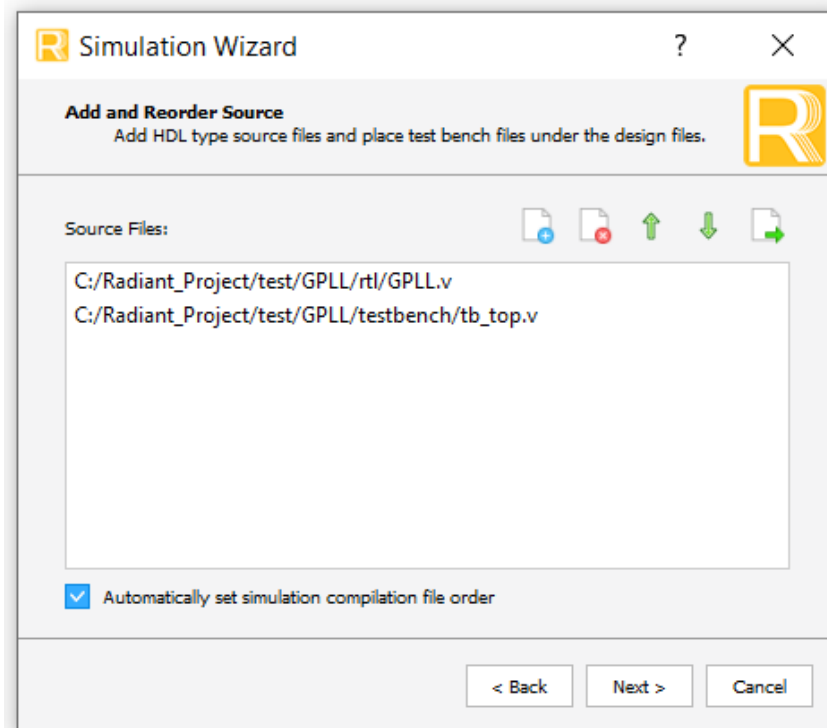


Figure 3.5. Adding and Reordering Source

Note: It is necessary to follow the procedure above until it is fully automated in the Lattice Radiant Software Suite. The results of the simulation in our example is shown in [Figure 3.6](#).

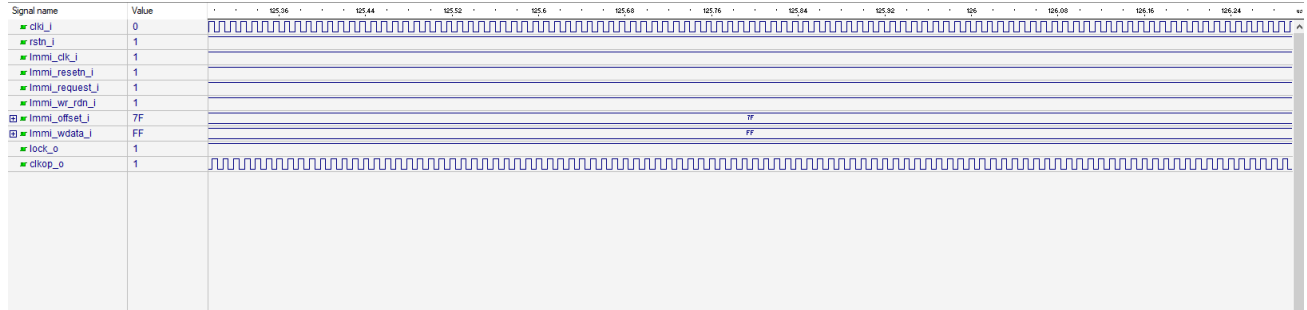


Figure 3.6. Simulation Waveform

3.4. Hardware Evaluation

There is no restriction on the hardware evaluation of this module.

Appendix A. Limitations

Following are the known limitations:

- Generation requires clicking the Calculate button first before clicking the Generate button for proper calculation of PLL analog parameters.
- Currently, *ipgen* command is not supported.

References

For complete information on Lattice Radiant Project-Based Environment, Design Flow, Implementation Flow and Tasks, as well as on the Simulation Flow, see the [Lattice Radiant Software 2.0 User Guide](#).

Technical Support Assistance

Submit a technical support case through www.latticesemi.com/techsupport.

Revision History

Document Revision 1.0, Lattice Radiant SW version 2.0, December 2019

Section	Change Summary
All	<ul style="list-style-type: none">• Updated document status from Preliminary to final.• Removed features not implemented in this release.
Appendix	Added this section.

Document Revision 0.80, Lattice Radiant SW version 2.0, October 2019

Section	Change Summary
All	Preliminary release



www.latticesemi.com