



# **MachXO2 Family Data Sheet Supplement for LVCMOS10 Inputs and BIDIs**

## **Data Sheet**

FPGA-DS-02062-1.2

November 2019

## Disclaimers

Lattice makes no warranty, representation, or guarantee regarding the accuracy of information contained in this document or the suitability of its products for any particular purpose. All information herein is provided AS IS and with all faults, and all risk associated with such information is entirely with Buyer. Buyer shall not rely on any data and performance specifications or parameters provided herein. Products sold by Lattice have been subject to limited testing and it is the Buyer's responsibility to independently determine the suitability of any products and to test and verify the same. No Lattice products should be used in conjunction with mission- or safety-critical or any other application in which the failure of Lattice's product could create a situation where personal injury, death, severe property or environmental damage may occur. The information provided in this document is proprietary to Lattice Semiconductor, and Lattice reserves the right to make any changes to the information in this document or to any products at any time without notice.

## Contents

1. Overview.....	4
2. sysI/O Recommended Operating Conditions .....	4
3. sysI/O Single-Ended DC Electrical Characteristics .....	4
Technical Support Assistance .....	5
Revision History.....	6

## Figures

Figure 1.1.....	4
-----------------	---

## Tables

Table 2.1. sysI/O Recommended Operating Conditions.....	4
Table 3.1. sysI/O Single-Ended DC Electrical Characteristics.....	4

# 1. Overview

This document is a supplement to the MachXO2 Family Data Sheet and provides the following additions or customizations:

- Support for LVCMOS10R33 and LVCMOS10R25 inputs and BIDs for all ZE devices and –6 speed grade for HE and HC devices

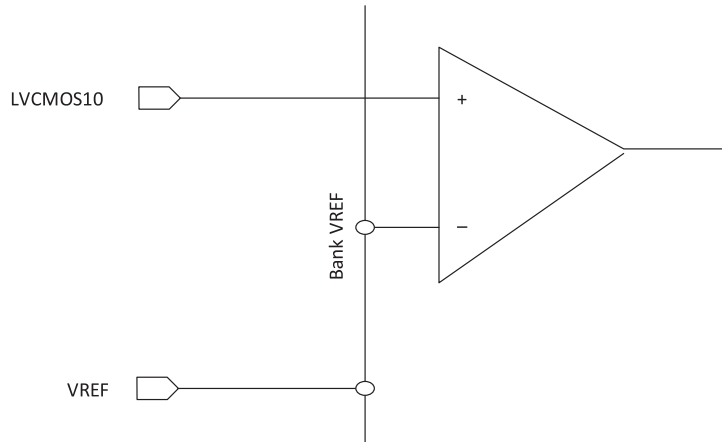


Figure 1.1.

# 2. sysI/O Recommended Operating Conditions

Table 2.1. sysI/O Recommended Operating Conditions

Standard	V <sub>CCIO</sub> (V)			V <sub>REF</sub> (V)		
	Min.	Typ.	Max.	Min.	Typ.	Max.
LVCMOS10R33	3.135	3.3	3.6	0.35	0.5	0.65
LVCMOS10R25	2.375	2.5	2.625	0.35	0.5	0.65

# 3. sysI/O Single-Ended DC Electrical Characteristics

Table 3.1. sysI/O Single-Ended DC Electrical Characteristics

Input/Output Standard	V <sub>IL</sub>		V <sub>IH</sub>		V <sub>OL</sub> Max. (V)	V <sub>OH</sub> Min. (V)	I <sub>OL</sub> (mA)	I <sub>OH1</sub> (mA)
	Min. (V)	Max. (V)	Min. (V)	Max. (V)				
LVCMOS10R33	-0.3	V <sub>REF</sub> – 0.1	V <sub>REF</sub> + 0.1	3.465	0.40	N/A Open Drain	16, 12, 8, 4	N/A Open Drain
LVCMOS10R25	-0.3	V <sub>REF</sub> – 0.1	V <sub>REF</sub> + 0.1	3.465	0.40	N/A Open Drain	12, 8, 4	N/A Open Drain

## Technical Support Assistance

Submit a technical support case through [www.latticesemi.com/techsupport](http://www.latticesemi.com/techsupport).

## Revision History

### Revision 1.2, November 2019

Section	Change Summary
All	<ul style="list-style-type: none"><li>Changed document number from DS1035 S to FPGA-DS-02062.</li><li>Updated document template.</li></ul>
Disclaimers	Added this section.

### Revision 1.1, November 2015

Section	Change Summary
Overview	Corrected typo error in this section.

### Revision 1.0, November 2015

Section	Change Summary
All	Initial release.



[www.latticesemi.com](http://www.latticesemi.com)