



OSC Module - Lattice Radiant Software

User Guide

FPGA-IPUG-02065-1.3

October 2020

Disclaimers

Lattice makes no warranty, representation, or guarantee regarding the accuracy of information contained in this document or the suitability of its products for any particular purpose. All information herein is provided AS IS and with all faults, and all risk associated with such information is entirely with Buyer. Buyer shall not rely on any data and performance specifications or parameters provided herein. Products sold by Lattice have been subject to limited testing and it is the Buyer's responsibility to independently determine the suitability of any products and to test and verify the same. No Lattice products should be used in conjunction with mission- or safety-critical or any other application in which the failure of Lattice's product could create a situation where personal injury, death, severe property or environmental damage may occur. The information provided in this document is proprietary to Lattice Semiconductor, and Lattice reserves the right to make any changes to the information in this document or to any products at any time without notice.

Contents

Acronyms in This Document.....	5
1. Introduction.....	6
1.1. Quick Facts.....	6
1.2. Features.....	6
1.3. Conventions.....	7
1.3.1. Nomenclature.....	7
1.3.2. Signal Names.....	7
1.3.3. Attribute Names.....	7
2. Functional Description.....	8
2.1. Signal Descriptions.....	9
2.2. Attribute Summary.....	9
3. IP Generation, Synthesis, and Validation.....	11
3.1. Licensing the IP.....	11
3.2. Generating and Synthesizing the IP.....	11
3.3. Running the Functional Simulation.....	14
Appendix A. Limitations.....	16
References.....	17
Technical Support Assistance.....	18
Revision History.....	19

Figures

Figure 2.1. OSC Block Diagram.....	8
Figure 3.1. Module/IP Block Wizard	11
Figure 3.2. Configure User Interface of OSC Module.....	12
Figure 3.3. Check Generating Result.....	12
Figure 3.4. Simulation Wizard.....	14
Figure 3.5. Adding and Reordering Source	15
Figure 3.6. Simulation Waveform	15

Tables

Table 1.1. OSC Module Quick Facts	6
Table 2.1. OSC Module Signal Description.....	9
Table 2.2. Attributes Table	9
Table 2.3. Attributes Descriptions	10
Table 3.1. Generated File List	13

Acronyms in This Document

A list of acronyms used in this document.

Acronym	Definition
DC	Direct Current
LSE	Lattice Synthesis Engine
FPGA	Field Programmable Gate Array

1. Introduction

The Lattice Semiconductor Oscillator (OSC) Module for CrossLink™-NX and Certus™-NX is designed to produce two clock signals that drive the FPGA clock tree for user-specific applications. The trimmed low frequency oscillator and trimmed high frequency oscillator are also used by the IP sub-system of the FPGA. The low frequency oscillator always run, even at sleep mode.

1.1. Quick Facts

Table 1.1 shows a summary of the OSC Module.

Table 1.1. OSC Module Quick Facts

IP Requirements	Supported FPGA Families	CrossLink-NX, Certus-NX
Resource Utilization	Targeted Devices	LIFCL-40, LIFCL-17, LFD2NX-40
	Supported User Interfaces	Native interfaces; please refer to the Signal Descriptions section.
Design Tool Support	Lattice Implementation	Lattice Radiant® Software 2.1
	Synthesis	Lattice Synthesis Engine (LSE)
		Synopsys® Synplify Pro® for Lattice
Simulation	For the list of supported simulators, see the Lattice Radiant Software 2.1 User Guide .	

1.2. Features

The key features of this module are:

- Independent output enable
- Built-in divider with static control
- Dynamic on/off glitchless enable/disable
- Low DC leakage in both Stand-by Mode and in Sleep Mode
- Low frequency oscillator output is 32 kHz +/-10%
- High frequency oscillator output is 450 MHz +/-10% and is controlled by a user-configurable frequency divider.
- Maximum oscillator frequency for user application is 225 MHz
- Active current consumption of 6 uA for LF OSC and 0.3 mA for HF OSC

1.3. Conventions

1.3.1. Nomenclature

The nomenclature used in this document is based on Verilog HDL.

1.3.2. Signal Names

Signal names that end with:

- *_n* are active low
- *_i* are input signals
- *_o* are output signals

1.3.3. Attribute Names

Attribute names in this document are formatted in title case and italicized (*Attribute Name*).

2. Functional Description

OSC Module includes two accuracy oscillators, which can be individually enabled. One oscillator generates an internal 128 kHz clock used by the IP sub-system. This clock is divided by 4 for user-specific application. The other oscillator provides a clock whose maximum frequency is 450 MHz and hardened dividers allowing optional division from 2 to 256 to scale the output frequency down. The maximum frequency for user application is 450 MHz divided by 2, which is 225 MHz.

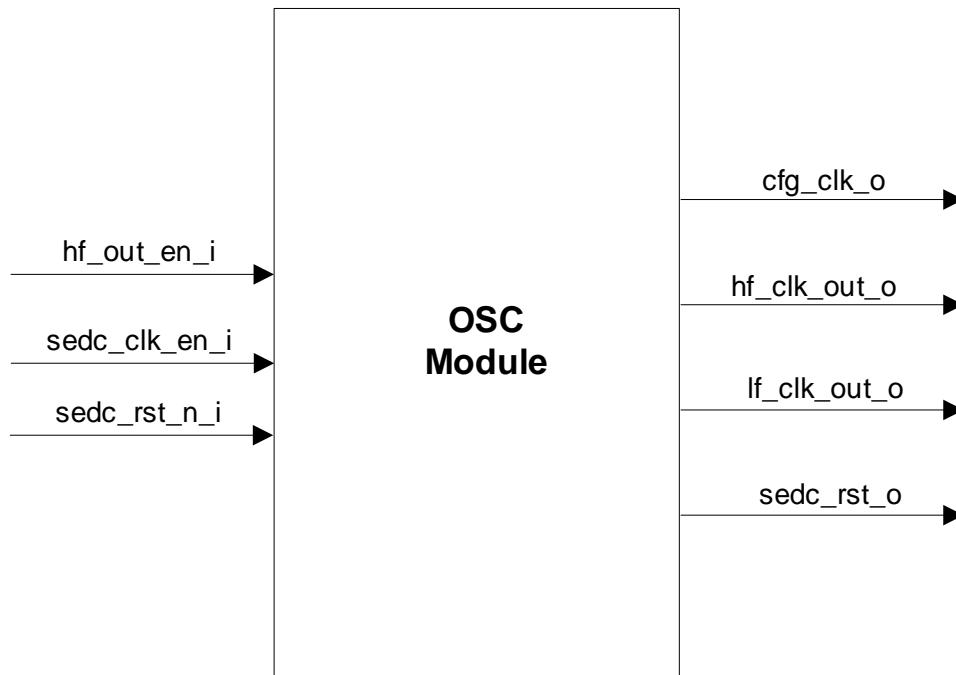


Figure 2.1. OSC Block Diagram

2.1. Signal Descriptions

Table 2.1. OSC Module Signal Description

Port Name	I/O	Width	Description
Clock ports			
hf_clk_out_o	Out	1	High frequency clock output, enabled by <i>HFCLK Enable</i> and controlled by <i>HFCLK Divider</i> .
lf_clk_out_o	Out	1	Low frequency clock output after div4:32 kHz, controlled by <i>LFCLK Enable</i> .
cfg_clk_o	Out	1	Config clock output, enabled by <i>SEDCLK Enable</i> and controlled by <i>SEDCLK Divider</i> .
Enable Ports			
hf_out_en_i	In	1	Enable port for hf_clock_out_o
sedc_clk_en_i	In	1	Available if <i>SEDCLK Enable</i> == ENABLED BY SIGNAL
Reset port			
sedc_rst_o	Out	1	Reset port for SEDC. Available if <i>SEDCLK Enable</i> == ALWAYS ENABLED or <i>SEDCLK Enable</i> == ENABLED BY SIGNAL

2.2. Attribute Summary

The configurable attributes of the OSC Module are shown in [Table 2.2](#) and are described in [Table 2.3](#). The attributes can be configured through the IP Catalog's Module/IP wizard of the Lattice Radiant Software.

Table 2.2. Attributes Table

Attribute	Selectable Values	Default	Dependency on Other Attributes
General			
HFCLK Enable	ENABLED DISABLED	ENABLED	—
HFCLK Divider	2-256	2	Active if <i>HFCLK Enable</i> == ENABLED
HFCLK Frequency(MHz)	N/A	225	—
LFCLK Enable	DISABLED ENABLED	DISABLED	—
LFCLK Frequency (kHz)	N/A	32	—
SEDCLK Enable	DISABLED ALWAYS ENABLED ENABLED BY SIGNAL	DISABLED	—
SEDCLK Divider	2-256	2	Active if: <i>SEDCLK Enable</i> == ALWAYS ENABLED or <i>SEDCLK Enable</i> == ENABLED BY SIGNAL
SEDCLK Frequency (MHz)	N/A	225	—

Table 2.3. Attributes Descriptions

Attribute	Description
General	
HFCLK Enable	Enables the presence of hf_clk_out_o signal on the generated IP. ENABLED – Signal is available. DISABLED – Signal is unavailable.
HFCLK Divider	Specifies the divider of the High Frequency Oscillator.
HFCLK Frequency(MHz)	Specifies the HFCLK Frequency, wherein, <i>HFCLK Frequency == (450MHz/HFCLK Divider).</i> The 450 MHz oscillator is used internally by the IP sub-system. Maximum oscillator frequency for user application is 225 MHz (450 MHz divided by 2)
LFCLK Enable	Enables the presence of lf_clk_out_o signal on the generated IP. ENABLED – Signal is available. DISABLED – Signal is unavailable.
LFCLK Frequency (kHz)	Specifies the LFCLK Frequency after div4, which means that the internal LFCLK (128kHz) is divided by 4. Fixed attribute value is 32 kHz.
SEDCLK Enable	Enables the presence of sedc_clk_en_i and cfg_clk_o signal on the generated IP. ALWAYS ENABLED – sedc_clk_en_i signal is unavailable and is tied to 1'b1, cfg_clk_o signal available. ENABLED BY SIGNAL: sedc_clk_en_i and cfg_clk_o signals are available. DISABLED – sedc_clk_en_i and cfg_clk_o signals are unavailable; input signal is tied to 1'b1 and output signal is dangling.
SEDCLK Divider	Specifies the frequency divider of the SEDCLK.
SEDCLK Frequency (MHz)	Specifies the SEDCLK Frequency wherein: <i>SEDCLK Frequency == (450 MHz/SEDCLK Divider).</i>

3. IP Generation, Synthesis, and Validation

This section provides information on how to generate and synthesize this module using the Lattice Radiant Software. For more on Lattice Radiant Software, please refer to the [Lattice Radiant Software 2.1 User Guide](#) and relevant tutorials.

3.1. Licensing the IP

No license is required for this module.

3.2. Generating and Synthesizing the IP

The Lattice Radiant Software allows you to customize and generate modules and IPs and integrate them into the device’s architecture. The procedure for generating the OSC Module in Lattice Radiant Software is described below.

To generate the OSC Module:

1. Create a new Lattice Radiant Software project or open an existing project.
2. In the **IP Catalog** tab, double-click on **OSC** under **Module, Architecture_Modules** category. The **Module/IP Block Wizard** opens as shown in [Figure 3.1](#). Enter values in the **Instance name** and the **Create in** fields and click **Next**.

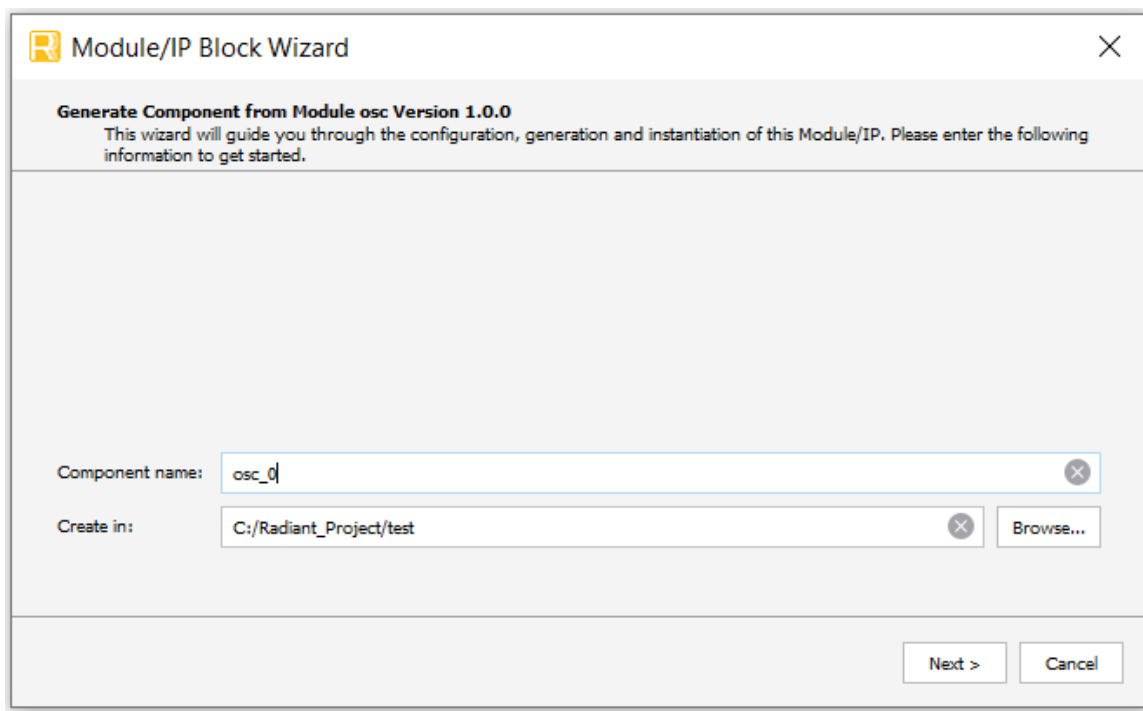


Figure 3.1. Module/IP Block Wizard

3. In the module’s dialog box of the **Module/IP Block Wizard** window, customize the selected OSC Module using drop-down menus and check boxes. As a sample configuration, see [Figure 3.2](#). For configuration options, see the [Attribute Summary](#) section.

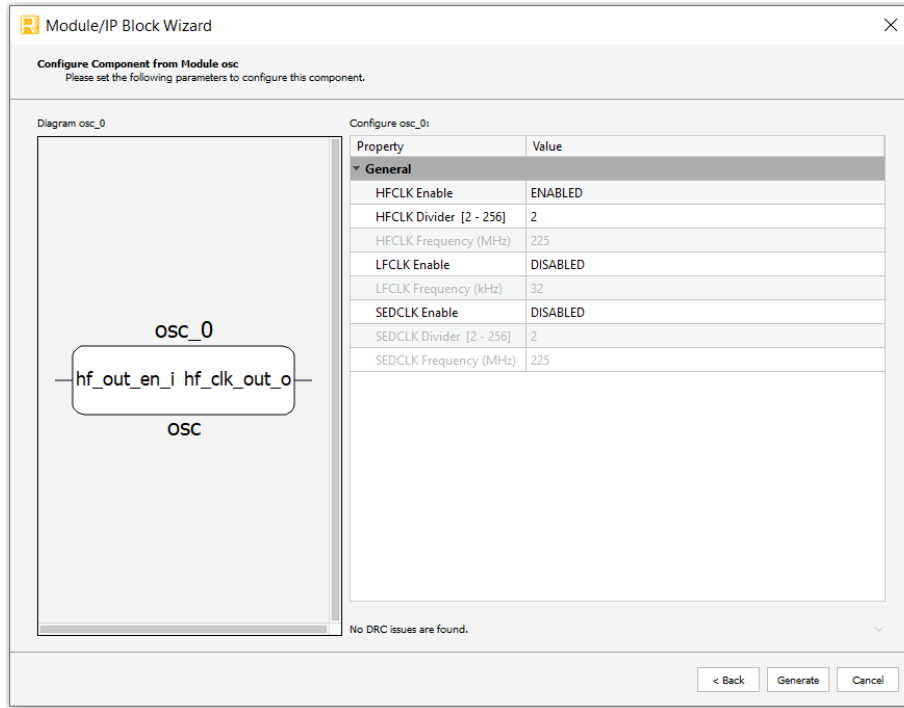


Figure 3.2. Configure User Interface of OSC Module

- Click **Generate**. The **Check Generating Result** dialog box opens, showing design block messages and results as shown in Figure 3.3.

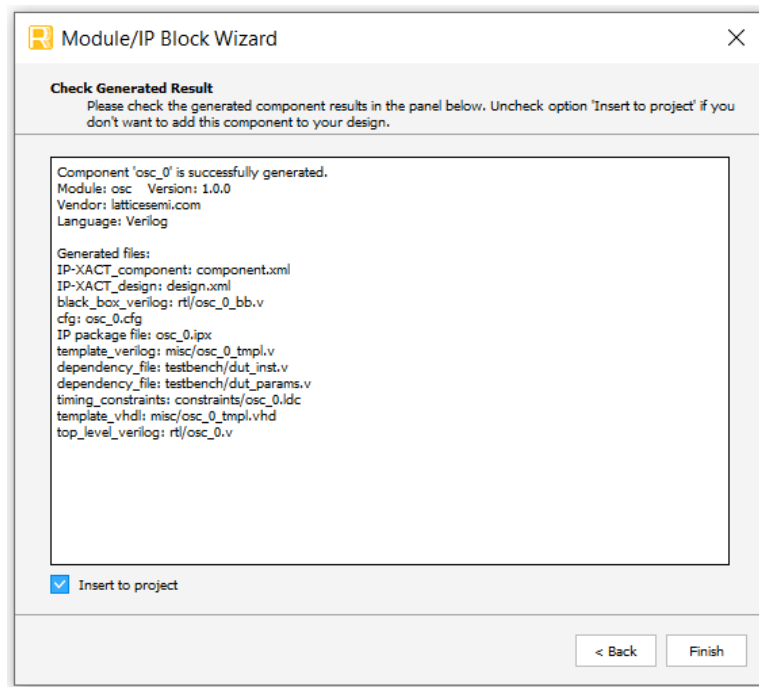


Figure 3.3. Check Generating Result

- Click the **Finish** button. All the generated files are placed under the directory paths in the **Create in** and the **Instance name** fields shown in [Figure 3.1](#).

The generated OSC Module package includes the black box (<Instance Name>_bb.v) and instance templates (<Instance Name>_tmpl.v/vhd) that can be used to instantiate the module in a top-level design. An example RTL top-level reference source file (<Instance Name>.v) that can be used as an instantiation template for the module is also provided. You may also use this top-level reference as the starting template for the top-level for their complete design. The generated files are listed in [Table 3.1](#).


Table 3.1. Generated File List

Attribute	Description
<Instance Name>.ipx	This file contains the information on the files associated to the generated IP.
<Instance Name>.cfg	This file contains the attribute values used in IP configuration.
component.xml	Contains the ipxact:component information of the IP.
design.xml	Documents the configuration attributes of the IP in IP-XACT 2014 format.
rtl/<Instance Name>.v	This file provides an example RTL top file that instantiates the module.
rtl/<Instance Name>_bb.v	This file provides the synthesis black box.
misc/<Instance Name>_tmpl.v misc /<Instance Name>_tmpl.vhd	These files provide instance templates for the module.

3.3. Running the Functional Simulation

Running functional simulation can be performed after the IP is generated.

To run Verilog simulation:

1. Click the  button located on the Toolbar to initiate the Simulation Wizard shown in Figure 3.4.

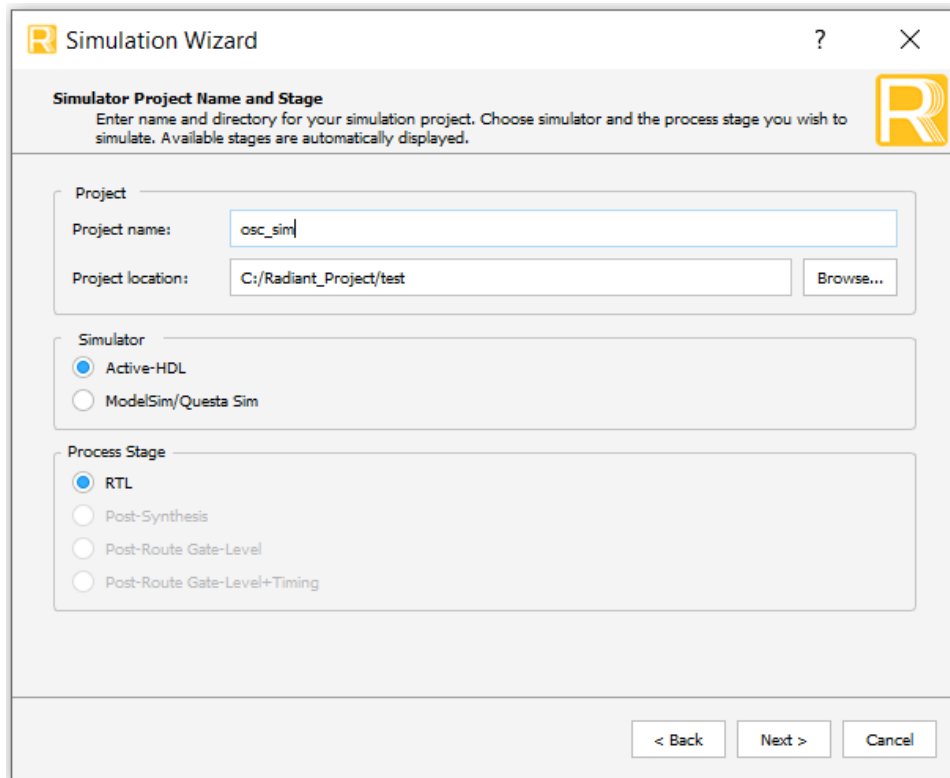


Figure 3.4. Simulation Wizard

2. Click **Next** to open the **Add and Reorder Source** window as shown in Figure 3.5.

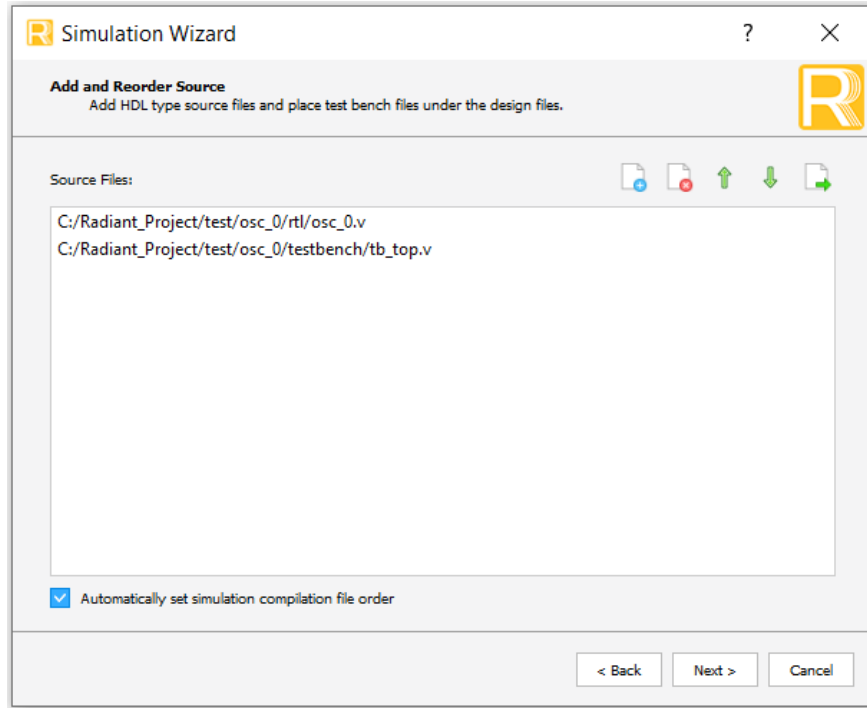


Figure 3.5. Adding and Reordering Source

3. Click **Next**. The **Summary** window is shown. Click **Finish** to run the simulation.

Note: It is necessary to follow the procedure above until it is fully automated in the Lattice Radiant Software Suite.

The results of the simulation in our example are provided in [Figure 3.6](#).

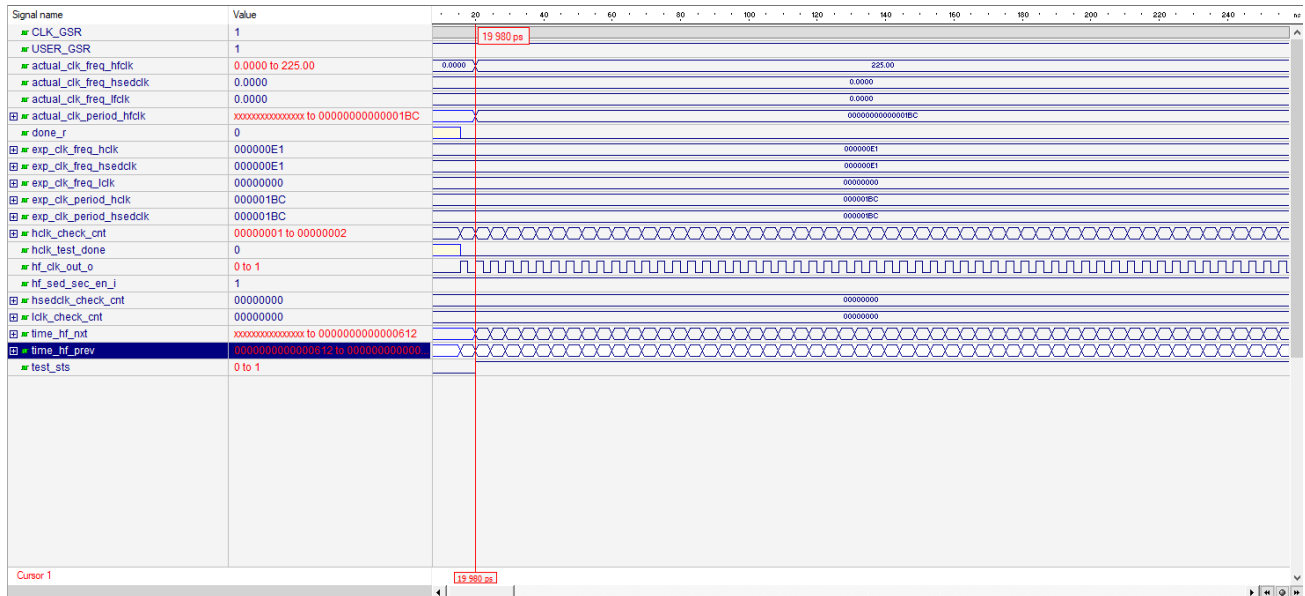


Figure 3.6. Simulation Waveform

Appendix A. Limitations

Following is a known limitation:

- `cfg_clk_o` frequency not changing based on *SEDCLK Divider*
Even though the SEDCLK Divider is in the OSC Module, the divider is physically located in the SEDC block. Therefore, you do not see the CFG_CLK output frequency changes according to the *SEDCLK Divider* attribute. There is no simulation model to support SEDC to run SEDC-related simulation.

References

For complete information on Lattice Radiant Project-Based Environment, Design Flow, Implementation Flow and Tasks, as well as on the Simulation Flow, see the [Lattice Radiant Software 2.1 User Guide](#).

Technical Support Assistance

Submit a technical support case through www.latticesemi.com/techsupport.

Revision History

Document Revision 1.3, Lattice Radiant SW version 2.2, October 2020

Section	Change Summary
Appendix A. Limitations	Added this section.

Document Revision 1.2, Lattice Radiant SW version 2.1, June 2020

Section	Change Summary
Acronyms in This Document	Added this section.
Introduction	<ul style="list-style-type: none"> Added Certus-NX support. Updated Table 1.1 to add LFD2NX-40 as targeted device. Updated Lattice Implementation to Lattice Radiant 2.1.
Functional Description	<ul style="list-style-type: none"> Updated Figure 2.1. Updated SEDCLK Enable description in Table 2.2. Attributes Table.
Signal Description	Updated SEDC signal names and added output SEDC reset port.

Document Revision 1.1, Lattice Radiant SW version 2.0, February 2020

Section	Change Summary
Introduction	Updated Table 1.1 to add LIFCL-17 as targeted device.
Functional Description	<ul style="list-style-type: none"> Updated Figure 2.1. OSC Block Diagram. Updated Table 2.1. OSC Module Signal Description.
IP Generation, Synthesis, and Validation	Updated Figure 3.2. Configure User Interface of OSC Module.

Document Revision 1.0, Lattice Radiant SW version 2.0, November 2019

Section	Change Summary
All	Changed document status from Preliminary to final.
Introduction	Added <i>Maximum oscillator frequency for user application is 225MHz</i> in Features section.
IP Generation, Synthesis, and Validation	Updated Figure 3.6. Simulation Waveform.

Document Revision 0.80, Lattice Radiant SW version 2.0, October 2019

Section	Change Summary
All	Preliminary release.



www.latticesemi.com