



MachXO2 Product Family Qualification Summary

Lattice Document # MS – 106923 June, 2020

TITLE: QUALIFICATION SUMMARY MachXO2 Product Family		
Document No: MS-106923	Rev: N	Page 1 of 39

TABLE OF CONTENTS

1.0 INTRODUCTION	3
2.0 LATTICE PRODUCT QUALIFICATION PROGRAM	4
<i>Figure 2.0.1 Lattice Standard Product Qualification Process Flow</i>	5
<i>Table 2.0.2 Standard Qualification Testing</i>	7
<i>Table 2.0.3 Industry Standard Qualification Testing for WLCSP Packages</i>	8
3.0 QUALIFICATION DATA MACHXO2 PRODUCT FAMILY	9
3.1 MACHXO2 PRODUCT FAMILY LIFE (HTOL) DATA	9
<i>Table 3.1.1 MachXO2 Product Family Life Results using Pre-Production Wafer Fab Process Development Lots</i>	10
<i>Table 3.1.2 MachXO2 Product Family Life Results Run on Production-Process Wafer Fabrication Lots</i>	11
3.2 MACHXO2 PRODUCT FAMILY HIGH TEMPERATURE RETENTION (HTRX) DATA	12
<i>Table 3.2.1 MachXO2 High Temperature Retention Results</i>	12
3.3 MACHXO2 PRODUCT FAMILY FLASH ENDURANCE CYCLING DATA	13
<i>Table 3.3.1 MachXO2 Flash Extended Endurance Results</i>	13
3.4 MACHXO2 PRODUCT FAMILY – ESD AND LATCH UP DATA	14
<i>Electrostatic Discharge-Human Body Model:</i>	14
<i>Electrostatic Discharge-Charged Device Model:</i>	16
<i>Latch-Up:</i>	18
4.0 PACKAGE QUALIFICATION DATA FOR MACHXO2 PRODUCT FAMILY	20
<i>Table 4.0.1 Product-Package Qualification-By-Similarity Matrix</i>	21
<i>Table 4.02 WLCSP Package Qualification-By-Similarity Matrix</i>	22
4.1 MACHXO2 PRODUCT FAMILY SURFACE MOUNT PRECONDITIONING TESTING: SMPC	23
<i>Table 4.1.1 Surface Mount Precondition Data</i>	24
4.2 MACHXO2 PRODUCT FAMILY TEMPERATURE CYCLING DATA: T.C	26
<i>Table 4.2.1 Temperature Cycling Data</i>	26
4.3 MACHXO2 PRODUCT FAMILY UNBIASED HAST DATA: UHAST	28
<i>Table 4.3.1 Unbiased HAST Data</i>	28
4.4 MACHXO2 PRODUCT FAMILY BIASED HAST DATA: BHAST	30
<i>Table 4.4.1 Biased HAST Data</i>	30
4.5 MACHXO2 PRODUCT FAMILY TEMPERATURE HUMIDITY BIAS DATA: THB	31
<i>Table 4.5.1 Temperature Humidity Bias Data:</i>	31
4.6 MACHXO2 PRODUCT FAMILY HIGH TEMPERATURE STORAGE LIFE (HTSL)	32
<i>Table 4.6.1 MachXO2 High Temperature Storage Life Results</i>	32
5.0 BOARD LEVEL RELIABILITY (BLR) STRESS METHODS	34
<i>Table 5.0.1 Slow-Temp Cycling, IPC-JEDEC9701 & JEDEC JESD22-A104 condition G, soak mode 2</i>	35
<i>Table 5.0.2 Bend Testing, IPC-JEDEC9702 & JEDEC JESD22-B113A</i>	35
<i>Table 5.0.3 Drop & Mechanical Shock Testing, IPC-JEDEC9703 & JEDEC JESD22-B111 / JESD-B104C</i>	35
6.0 MACHXO2 PROCESS WAFER LEVEL RELIABILITY (WLR)	36
<i>Table 6.0.1 Wafer Level Reliability (WLR) Results</i>	36
7.0 MACHXO2 SOFT ERROR RATE DATA	37
<i>Table 7.0.1 MachXO2 MEASURED FITs / Mb</i>	37
8.0 MACHXO2 ADDITIONAL FAMILY DATA	38
<i>Table 8.0.1 MachXO2 Package Assembly Data – BGA, WLCSP, QFN & TQFP</i>	38

INTRODUCTION

The MachXO2 family of ultra-low power, instant-on, non-volatile PLDs has six devices with densities ranging from 256 to 6864 Look-Up Tables (LUTs). In addition to LUT-based, low-cost programmable logic these devices feature Embedded Block RAM (EBR), Distributed RAM, User Flash Memory (UFM), Phase Locked Loops (PLLs), pre-engineered source synchronous I/O support, advanced configuration support including dual-boot capability and hardened versions of commonly used functions such as SPI controller, I2C controller and timer/counter. These features allow these devices to be used in low cost, high volume consumer and system applications.

The MachXO2 devices are designed on a 65nm non-volatile low power process. The device architecture has several features such as programmable low swing differential I/Os and the ability to turn off I/O banks, on-chip PLLs and oscillators dynamically. These features help manage static and dynamic power consumption resulting in low static power for all members of the family.

The MachXO2 devices are available in three options – ultra low power (ZE) and high performance (HC and HE) devices. The ultra-low power devices are offered in three speed grades -1, -2 and -3, with -3 being the fastest. Similarly, the high-performance devices are offered in three speed grades: -4, -5 and -6, with -6 being the fastest. HC devices have an internal linear voltage regulator which supports external VCC supply voltages of 3.3V or 2.5V. ZE and HE devices only accept 1.2V as the external VCC supply voltage. With the exception of power supply voltage all three types of devices (ZE, HC and HE) are functionally compatible and pin compatible with each other.

The MachXO2 PLDs are available in a broad range of advanced halogen-free packages ranging from the space saving 2.5x2.5 mm WLCSP to the 23x23 mm fpBGA. MachXO2 devices support density migration within the same package.

2.0 LATTICE PRODUCT QUALIFICATION PROGRAM

Lattice Semiconductor Corp. maintains a comprehensive reliability qualification program to assure that each product achieves its reliability goals. After initial qualification, the continued high reliability of Lattice products is assured through ongoing monitor programs as described in Lattice Semiconductor's Reliability Monitor Program Procedure (Doc. #101667). All product qualification plans are generated in conformance with Lattice Semiconductor's Qualification Procedure (Doc. #100164) with failure analysis performed in conformance with Lattice Semiconductor's Failure Analysis Procedure (Doc. #100166). Both documents are referenced in Lattice Semiconductor's Quality Assurance Manual, which can be obtained upon request from a Lattice Semiconductor sales office. Figure 2.1 shows the Product Qualification Process Flow.

If failures occur during qualification, an 8D process is used to find root cause and eliminate the failure mode from the design, materials, or process. The effectiveness of any fix or change is validated through additional testing as required. Final testing results are reported in the qualification reports.

Failure rates in this reliability report are expressed in FITs. Due to the very low failure rate of integrated circuits, it is convenient to refer to failures in a population during a period of 10^9 device hours; one failure in 10^9 device hours is defined as one FIT.


Product families are qualified based upon the requirements outlined in Table 2.2. In general, Lattice Semiconductor follows the current Joint Electron Device Engineering Council (JEDEC) and Military Standard testing methods. Lattice automotive products are qualified and characterized to the Automotive Electronics Council (AEC) testing requirements and methods. Product family qualification will include products with a wide range of circuit densities, package types, and package lead counts. Major changes to products, processes, or vendors require additional qualification before implementation.

The MachXO2 family is the third generation FPGA product family and first 65 nm (CS200FL) Flash Technology based product offering. The Lattice Semiconductor MachXO2 FPGA product family qualification efforts are based on the first MachXO2 devices in the family per the Lattice Semiconductor Qualification Procedure, doc# 100164.

Lattice Semiconductor maintains a regular reliability monitor program. The current Lattice Reliability Monitor Report can be found at [Product Reliability Monitor Report](#).

Figure 2.0.1 Lattice Standard Product Qualification Process Flow

This diagram represents the standard qualification flow used by Lattice to qualify new Product Families. The target end market for the Product Family determines which flow options are used. The MachXO2 Product Family was qualified using the Commercial / Industrial Qualification Option.

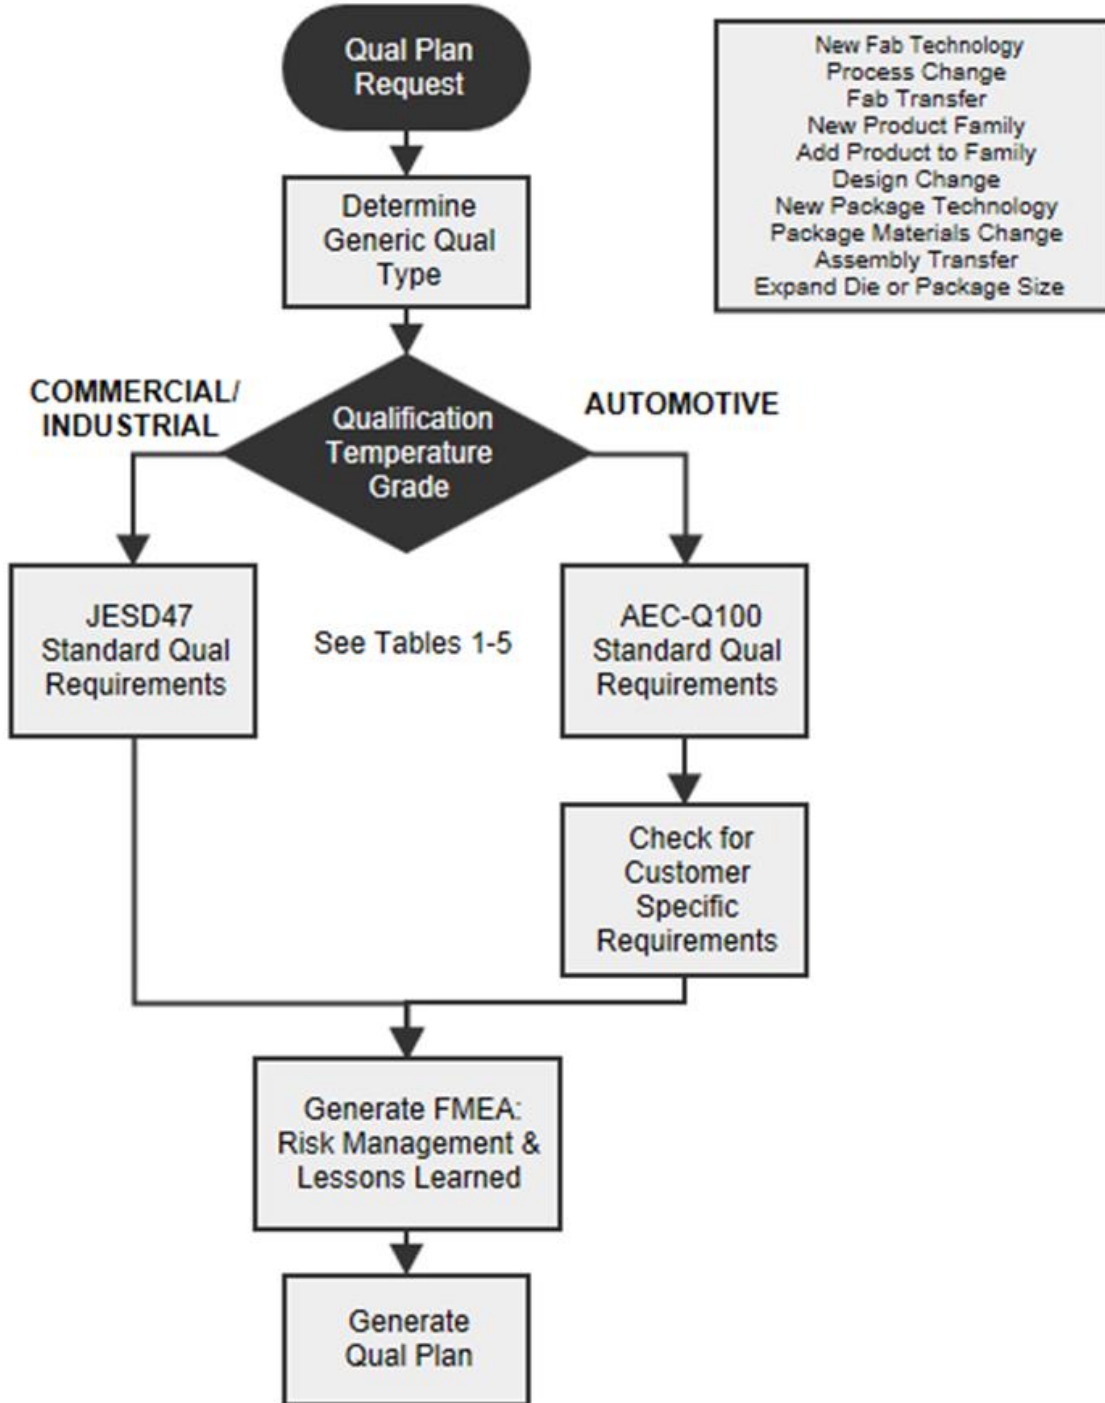

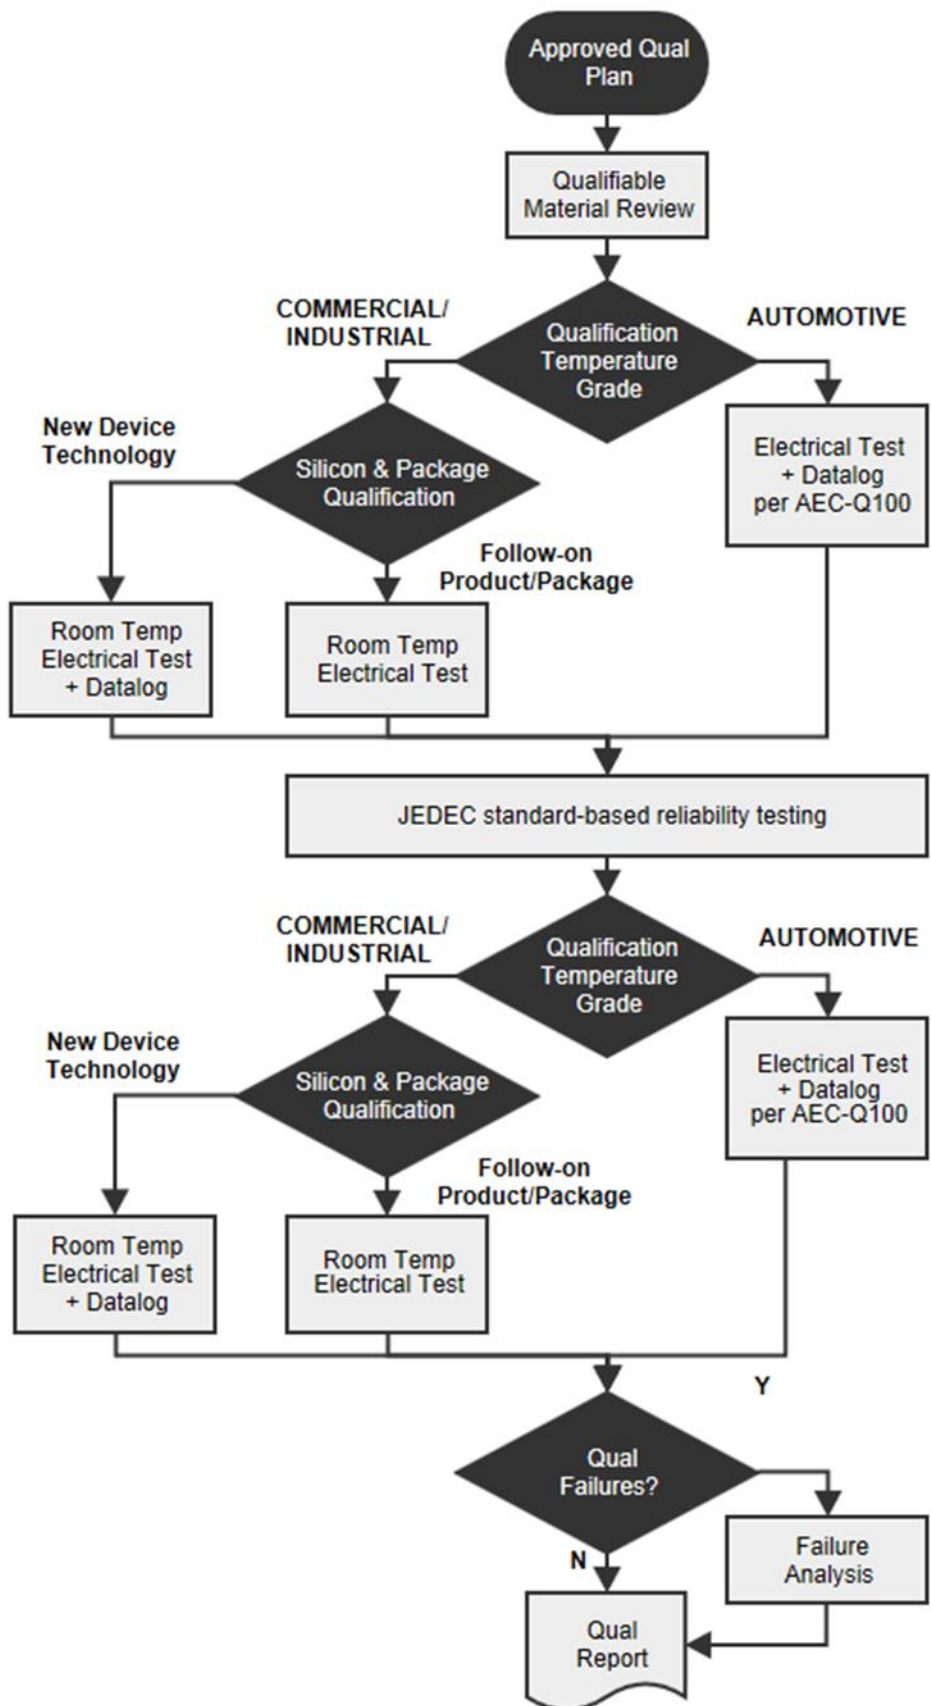


Table 2.0.2 Standard Qualification Testing

TEST	STANDARD	TEST CONDITIONS
High Temperature Operating Life (HTOL)	JESD22-A108	≥125°C Tj and max operating supplies
Human Body Model ESD (HBM)	JESD22-A114 / JS-001	25°C (Technology/Device dependent Performance Targets)
Charged Device Model ESD (CDM)	JESD22-C101 / JS-002-2014	25°C (Technology/Device dependent Performance Targets)
Latch-Up (LU)	JESD78	Class II, +/-100mA trigger current and AMR operating supplies
Accelerated Soft Error Testing (ASER)	JESD89	25°C, Nominal operating supplies
Surface Mount Pre-conditioning (SMPC)	IPC/JEDEC J-STD-020D JESD-A113	Per appropriate MSL level per J-STD-020
High Temp Storage Life (HTSL)	JESD22-A103	Condition B
Temperature Cycling (TC)	JESD22-A104	Condition B, soak mode 2 (typical)
Temperature Humidity Bias, THB (85/85) or Biased HAST (HAST)	JESD22-A101 JESD22-A110	85°C, 85 % RH, max operating supplies or 110°C, 85 % RH, max operating supplies or 130°C, 85 % RH, max operating supplies
Unbiased Temperature/Humidity (UHAST)	JESD22-A118	110°C, 85 % RH or 130°C, 85 % RH

Table 2.0.3 Industry Standard Qualification Testing for WLCSP Packages

STRESS TEST	STANDARD	TEST CONDITIONS
Slow-Temperature Cycling	JEDEC JESD22-A104 IPC-JEDEC9701A	Condition G, soak mode 2 (-40C to 125C, 7.5 min soak) 1-2 CPH for 3000 cycles
Bend Qualification	JEDEC JESD22-B113 IPC-JEDEC9702	200,000 bends of test boards at 1 to 3 Hz with maximum cross-head displacement of 4 mm
Drop Qualification Condition B (Handheld apps)	JEDEC JESD22-B111 IPC-JEDEC9703	1500g drops 0.5 millisecond duration half-sine pulse
Drop Qualification Condition H (Shipping)	JEDEC JESD22-B104 IPC-JEDEC9703	2900g drops 0.3 millisecond duration half-sine pulse

3.0 QUALIFICATION DATA MACHXO2 PRODUCT FAMILY

The MachXO2 devices are fabricated at Fujitsu on a 65nm non-volatile low power process, then assembled and tested at ASEM in Malaysia, ASET in Kaohsiung, Taiwan, ATP in Philippines, ATT in Taiwan (WLCSP only), and UTAC/NEPES in Singapore. The MachXO2 devices are available in three options – ultra low power (ZE) and high performance (HC and HE) devices. The LCMXO2-1200 is the lead qualification vehicle for this product family.

Product Family: MachXO2

Packages offered: TQFP, μ BGA, csBGA, caBGA, ftBGA, fpBGA, QFN and WLCSP

Process Technology Node: 65 nm Flash

3.1 MachXO2 Product Family Life (HTOL) Data

High Temperature Operating Life (HTOL) Test

The High Temperature Operating Life test is used to thermally accelerate those wear out and failure mechanisms that would occur as a result of operating the device continuously in a system application. Consistent with JEDEC JESD22-A108 “Temperature, Bias, and Operating Life”, a pattern specifically designed to exercise the maximum amount of circuitry is programmed into the device and this pattern is continuously exercised at specified voltages as described in test conditions for each device type. The Early Life Failure Rate (ELFR) test uses large samples sizes for a short duration (48 Hours) HTOL stress to determine the infant mortality rate of a device family.

MachXO2 Life Test (HTOL) Conditions:

Devices Stressed: LCMXO2

Pre-conditioning: All Flash cells Program/Erase cycled 10,000 times prior to HTOL stress.

Stress Duration: 48, 168, 500, 1000, 2000 hours.

Stress Conditions: MachXO2 (LCMXO2): HTOL Pattern, $V_{CC}=1.26V$, $V_{CCIO}=3.47V$ $T_{JUNCTION} = \geq 125^{\circ}C$

Method: Lattice Document # 101943 and JESD22-A108

The first 3 wafer lots of ELFR & HTOL stressed were **pre-production process development lots**.

Table 3.1.1 MachXO2 Product Family Life Results using Pre-Production Wafer Fab Process Development Lots

Product Name	Package	Lot Number	Quantity	48 Hrs Result	168 Hrs Result	500 Hrs Result	1000 Hrs Result	2000 Hrs Result	Cumulative Hours
LCMXO2-1200ZE	MG132	Lot #1	293*	1 _A	N/A	N/A	N/A	N/A	N/A
LCMXO2-1200HE	MG132	Lot #1	300*	0	N/A	N/A	N/A	N/A	N/A
LCMXO2-1200HC	MG132	Lot #1	299*	0	N/A	N/A	N/A	N/A	N/A
LCMXO2-1200ZE	MG132	Lot #2	300*	1 _A	N/A	N/A	N/A	N/A	N/A
LCMXO2-1200HE	MG132	Lot #2	300*	0	N/A	N/A	N/A	N/A	N/A
LCMXO2-1200HC	MG132	Lot #2	300*	0	N/A	N/A	N/A	N/A	N/A
LCMXO2-1200ZE	MG132	Lot #3	300*	0	N/A	N/A	N/A	N/A	N/A
LCMXO2-1200HE	MG132	Lot #3	299*	0	N/A	N/A	N/A	N/A	N/A
LCMXO2-1200HC	MG132	Lot #3	300*	0	N/A	N/A	N/A	N/A	N/A
LCMXO2-1200ZE	MG132	Lot #1	58	N/A	0	0	0	N/A	58,000
LCMXO2-1200HE	MG132	Lot #1	59	N/A	0	0	0	N/A	59,000
LCMXO2-1200HC	MG132	Lot #1	60	N/A	0	0	0	N/A	60,000
LCMXO2-1200ZE	TG144	Lot #1	50	N/A	0	0	0	N/A	50,000
LCMXO2-1200HE	TG144	Lot #1	50	N/A	0	0	0	N/A	50,000
LCMXO2-1200HC/640UHC	TG144	Lot #1	47	N/A	0	0	0 _B	N/A	47,000
LCMXO2-1200ZE	MG132	Lot #2	60	N/A	0	0	0	N/A	60,000
LCMXO2-1200HE	MG132	Lot #2	56	N/A	0	0	0	N/A	56,000
LCMXO2-1200HC	MG132	Lot #2	40	N/A	0	0	0	N/A	40,000
LCMXO2-1200ZE	TG144	Lot #2	49	N/A	0	0	0	0 _D	98,000
LCMXO2-1200HE	TG144	Lot #2	49	N/A	0	0	0	0	98,000
LCMXO2-1200HC/640UHC	TG144	Lot #2	47	N/A	0	0	0	0	94,000
LCMXO2-1200ZE	MG132	Lot #3	59	N/A	0	0	0	N/A	59,000
LCMXO2-1200HE	MG132	Lot #3	60	N/A	0	0	0	N/A	60,000
LCMXO2-1200HC	MG132	Lot #3	60	N/A	0	0	0	N/A	60,000
LCMXO2-1200ZE	TG144	Lot #3	50	N/A	0	0	0	0	100,000
LCMXO2-1200HE	TG144	Lot #3	49	N/A	0	0	1 _C	0	98,000
LCMXO2-1200HC/640UHC	TG144	Lot #3	50	N/A	0	0	0	0	100,000

* ELFR units did not receive Flash cell pre-condition cycling prior to stress.

A: Two (2) pre-production ELFR failures due to too-thin ILD0. A pre-production corrective & preventive process change was incorporated and then validated using Flash Extended Endurance, High Temperature Data Retention, and High Temperature Operating Life stresses.

B: FAR#1389: One temperature-sensitive device was a test escape Pre-HTOL stress. Not an HTOL failure. Unit removed from sample size.

C: FAR#1390: One working unit at 1k hr failed for flash "readback". Flash verified as good. Intermittent "Read" circuit. Not able to localize.

D: No FAR. One unit mechanically damaged due to handling. No longer able to retest that device. Unit removed from sample size.

Table 3.1.2 MachXO2 Product Family Life Results Run on Production-Process Wafer Fabrication Lots

Product Name	Package	Lot Number	Quantity	48 Hrs Result	168 Hrs Result	500 Hrs Result	1000 Hrs Result	2000 Hrs Result	Cumulative Hours
LCMXO2-1200ZE	MG132	Lot #6	60	N/A	0	0	0	N/A	60,000
LCMXO2-1200HE	MG132	Lot #6	60	N/A	0	0	0	N/A	60,000
LCMXO2-1200HC	MG132	Lot #6	60	N/A	0	0	0	N/A	60,000
LCMXO2-1200ZE	TG144	Lot #6	48	N/A	0	0	0	N/A	48,000
LCMXO2-1200HE	TG144	Lot #6	49	N/A	0	0	0	N/A	49,000
LCMXO2-1200HC/640UHC	TG144	Lot #6	50	N/A	0	0	0	N/A	50,000
LCMXO2-7000ZE	FTG256	Lot #1	40*	N/A	0	0	0	0	80,000
LCMXO2-7000HE	FTG256	Lot #1	40*	N/A	0	0	0	0	80,000
LCMXO2-7000HC	FTG256	Lot #1	40*	N/A	0	0	0	0	80,000
LCMXO2-7000ZE	TG144	Lot #1	50	N/A	0	0	0	0	100,000
LCMXO2-7000HE	TG144	Lot #1	48	N/A	0	0	0	0	96,000
LCMXO2-7000HC	TG144	Lot #1	48	N/A	0	0	0	0	96,000
LCMXO2-7000ZE	FTG256	Lot #2	40*	N/A	0	0	0	0	80,000
LCMXO2-7000HE	FTG256	Lot #2	40*	N/A	0	0	0	0	80,000
LCMXO2-7000HC	FTG256	Lot #2	40*	N/A	0	0	0	0	80,000
LCMXO2-7000ZE	TG144	Lot #2	50	N/A	0	0	0	0	100,000
LCMXO2-7000HE	TG144	Lot #2	48	N/A	0	0	0	0	96,000
LCMXO2-7000HC	TG144	Lot #2	48	N/A	0	0	0	0	96,000

* FTG256 packaged units did not receive Flash cell pre-condition cycling prior to stress.

MachXO2 Product Family Life Results Run on Production-Process Wafer Fabrication Lots

MachXO2 Cumulative Life Testing Device Hours = 1,391,000
MachXO2 Cumulative Result = 0 failures at 1000 & 2000 hours
MachXO2 Long Term Failure Rate = 9 FIT
FIT Assumptions: CL=60%, AE=0.7eV, Tjref=55C

MachXO2 ELFR (168Hrs) Cumulative Result / Sample Size = 0 / 859
MachXO2 HTOL (1000 Hrs) Cumulative Result / Sample Size = 0 / 859
MachXO2 HTOL (2000 Hrs) Cumulative Result / Sample Size = 0 / 532

3.2 MachXO2 Product Family High Temperature Retention (HTRX) Data

High Temperature Data Retention (HTRX)

The High Temperature Data Retention test measures the Flash cell reliability while the High Temperature Operating Life test is structured to measure functional operating circuitry failure mechanisms. The High Temperature Data Retention test is specifically designed to accelerate charge gain on to or charge loss off of the floating gates in the device's array. Since the charge on these gates determines the actual pattern and function of the device, this test is a measure of the reliability of the device in retaining programmed information. In High Temperature Data Retention, the Flash cell reliability is determined by monitoring the cell margin after biased static operation at 150°C ambient. Flash cells in the arrays are life tested with half the samples programmed with a checkerboard pattern and half with checkerboard-not patterns. Prior to data retention testing all Flash cells are pre-conditioned with 10,000 program/erase cycles.

MachXO2 Data Retention (HTRX) Conditions:

Stress Duration: 168, 500, 1000 hours.

Temperature: 150°C ambient

Stress Voltage MachXO2: $V_{CC}=1.26V$ / $V_{CCIO}=3.47V$

Method: Lattice Document # 101925 and JESD22-A103 / JESD22-A117

Table 3.2.1 MachXO2 High Temperature Retention Results

Product Name	Package	Assembly Site	Lot Number	Quantity	168 Hrs Result	500 Hrs Result	1000 Hrs Result	1500 Hrs Result	Cumulative Hours
LCMXO2-1200ZE	MG132	ASEM	Lot #3	76	0	0	0	NA	76,000
LCMXO2-1200ZE	MG132	ASEM	Lot #4	26*	0	0	0	NA	26,000
LCMXO2-1200ZE	MG132	ASEM	Lot #4	26*	0	0	0	NA	26,000
LCMXO2-1200ZE	MG132	ASEM	Lot #4	26*	0	0	0	NA	26,000
LCMXO2-1200ZE	MG132	ASEM	Lot #5	80	0	0	0	NA	80,000
LCMXO2-1200ZE	MG132	ASEM	Lot #6	80	0	0	0	0	120,000
LCMXO2-1200ZE	MG132	ASEM	Lot #6	80	0	0	0	0	120,000
LCMXO2-7000ZE	TG144	ASEM	Lot #1	80	0	0	0	0	120,000
LCMXO2-7000ZE	TG144	ASEM	Lot #2	80	0	0	0	0	120,000

* Qual lot #4 includes tunnel oxide (TOX) process splits: nominal, thick and thin TOX respectively. All passed qual.

Note: A detailed MachXO2 Flash Data Retention report is available upon request. Lattice Semiconductor Corp. document # 106925.

*MachXO2 Cumulative HTRX Failure Rate = 0 / 554
MachXO2 Cumulative HTRX Device Hours = 714,000*

3.3 MachXO2 Product Family Flash Endurance Cycling Data

Flash Extended Endurance testing measures the durability of the device through programming and erase cycles. Endurance testing consists of repeatedly programming and erasing all cells in the array at 25°C ambient to simulate programming cycles the user would perform. This test evaluates the integrity of the thin tunnel oxide through which current passes to program the floating gate in each cell of the array.

MachXO2 Flash Extended Endurance Test Conditions:

Stress Duration: 1K, 10K, 20K, 50K, 100K Cycles

Temperature: 25°C ambient

Stress Voltage MachXO2: $V_{CC}=1.26V / V_{CCIO}=3.47V$

Method: Lattice Document # 104633 and JESD22-A117

Table 3.3.1 MachXO2 Flash Extended Endurance Results

Product Name	Lot Number	Quantity	Cycling Temp	1K CYC	10K CYC	20K CYC	50K CYC	100K CYC
LCMXO2-1200ZE	Lot #6	54	25C	0	0	0	0	0
LCMXO2-7000ZE	Lot #1	60	25C	0	0	0	0	0
LCMXO2-7000ZE	Lot #2	60	25C	0	0	0	0	0
LCMXO2-256ZE	Lot #1	30	25C	0	0	0	0	0
LCMXO2-256ZE	Lot #2	30	25C	0	0	0	0	0
LCMXO2-640ZE	Lot #1	30	25C	0	0	0	0	0
LCMXO2-2000ZE	Lot #1	30	25C	0	0	0	0	0
LCMXO2-4000ZE	Lot #1	30	25C	0	0	0	0	0

The MachXO2 family uses the exact same Flash cell on all product densities and speed-power versions. The results above includes eight separate foundry lots of the same flash cell.

MachXO2 Cumulative Unit Level Endurance Failure Rate = 0 / 324

3.4 MachXO2 Product Family – ESD and Latch UP Data

Electrostatic Discharge-Human Body Model:

MachXO2 product family was tested per the JESD22-A114 Electrostatic Discharge (ESD) Sensitivity Testing Human Body Model (HBM) procedure and Lattice Procedure # 100844.

All units were Class tested at room ambient prior to reliability stress and after reliability stress. No failures were observed within the passing classification.

Table 3.4.1 MachXO2 ESD-HBM Data

Product	25-WLCSP (2.5x2.5m, 0.4mm pitch)	32-QFN (5x5mm, 0.5mm pitch)	49-WLCSP (3.2x3.2mm 0.4mm pitch)	64-ucBGA (4x4mm, 0.4mm pitch)	100-TQFP (14x14mm, 0.5mm pitch)	132-csBGA (8x8mm, 0.5mm pitch)	144-TQFP (20x20mm, 0.5mm pitch)	256-caBGA (14x14mm, 0.8mm pitch)	256-ftBGA (17x17mm, 1.0mm pitch)	332-caBGA (17x17mm, 0.8mil pitch)	484-fpBGA (23x23mm, 1.0mm pitch)
LCMXO2-7000ZE							HBM>2000 V Class 2	HBM>2000 V Class 2	HBM>2000 V Class 2	HBM>2000 V Class 2	HBM>2000 V Class 2
LCMXO2-4000ZE						HBM>2000 V Class 2	HBM>2000 V Class 2	HBM>2000 V Class 2	HBM>2000 V Class 2	HBM>2000 V Class 2	HBM>2000 V Class 2
LCMXO2-2000ZE			HBM >2000V Class 2		HBM>2000 V Class 2	HBM>2000 V Class 2	HBM>2000 V Class 2	HBM>2000 V Class 2	HBM>2000 V Class 2		
LCMXO2-1200ZE	HBM>2000 V Class 2				HBM>2000 V Class 2	HBM>2000 V Class 2	HBM>2000 V Class 2				
LCMXO2-640ZE					HBM>2000 V Class 2	HBM>2000 V Class 2					
LCMXO2-256ZE		HBM>2000 V Class 2		HBM>2000 V Class 2	HBM>2000 V Class 2	HBM>2000 V Class 2 QBS					

The LCMXO2-256ZE HBM is JESD22-A114/JS-001-2017 Class 2 starting with die code revision B. See Lattice PCN-07A-12 for details.

All HBM levels indicated are dual-polarity (\pm).

Qualification-by-Similarity (QBS) HBM uses the smallest package for a given product because the lowest package parasitics have the worst-case performance. All larger packages for a given product are qualified-by-similarity (QBS).

WLCSP HBM performance is the lowest package inductance and exceeds 2000V. This characterization exceeds the JEDEC requirements which is device specific in a single package.

Table 3.4.1 MachXO2 ESD-HBM Data (continued) - LCMXO2-2000ZE 49WLCSP CSR Data

HBM Voltage Level	Lot #1			Lot #2			Lot #3		
	Unit #1	Unit #2	Unit #3	Unit #1	Unit #2	Unit #3	Unit #1	Unit #2	Unit #3
2000 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
1500 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
1250 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
1000 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
750 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
500 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
250 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
125 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS

Table 3.4.1 MachXO2 ESD-HBM Data (continued)

Product	32-QFN (5x5mm, 0.5mm pitch)	64-ucBGA (4x4mm, 0.4mm pitch)	100-TQFP (14x14mm, 0.5mm pitch)	132-csBGA (8x8mm, 0.5mm pitch)	144-TQFP (20x20mm, 0.5mm pitch)	184csBGA (8x8mm, 0.5mm pitch)	256-caBGA (14x14mm, 0.8mm pitch)	256-ftBGA (17x17mm, 1.0mm pitch)	332-caBGA (17x17mm, 0.8mil pitch)	484-fpBGA (23x23mm, 1.0mm pitch)
LCMXO2-7000HC/HE					HBM>2000V Class 2		HBM>2000V Class 2	HBM>2000V Class 2	HBM>2000V Class 2	HBM>2000V Class 2
LCMXO2-4000HC/HE/ 2000UHC/UHE				HBM>2000V Class 2	HBM>2000V Class 2	HBM>2000V Class 2 QBS	HBM>2000V Class 2	HBM>2000V Class 2	HBM>2000V Class 2	HBM>2000V Class 2
LCMXO2-2000HC/HE/ 1200UHC			HBM>2000V Class 2	HBM>2000V Class 2	HBM>2000V Class 2		HBM>2000V Class 2	HBM>2000V Class 2		
LCMXO2-1200HC/640UHC			HBM>2000V Class 2	HBM>2000V Class 2	HBM>2000V Class 2					
LCMXO2-640HC			HBM>2000V Class 2	HBM>2000V Class 2						
LCMXO2-256HC	HBM>2000V Class 2	HBM>2000V Class 2	HBM>2000V Class 2	HBM>2000V Class 2						

HBM classification for Commercial/Industrial products, per JESD22-A114.

All HBM levels indicated are dual-polarity (\pm)

Qualification-by-Similarity (QBS) HBM uses the smallest package for a given product because the lowest package parasitics have the worst-case performance. All larger packages for a given product are qualified-by-similarity (QBS).

Electrostatic Discharge-Charged Device Model:

MachXO2 product family was tested per the JESD22-C101, Field-Induced Charged-Device Model Test Method for Electrostatic-Discharge-Withstand Thresholds of Microelectronic Components procedure and Lattice Procedure # 100844.

All units were Class tested at room ambient prior to reliability stress and after reliability stress. No failures were observed within the passing classification.

Table 3.4.2 MachXO2 ESD-CDM Data

Product	25-WLCSP (2.5x2.5mm, 0.4mm pitch)	32-QFN (5x5mm, 0.5mm pitch)	49-WLCSP (3.2x3.2mm 0.4mm pitch)	64-ucBGA (4x4mm, 0.4mm pitch)	100-TQFP (14x14mm, 0.5mm pitch)	132-csBGA (8x8mm, 0.5mm pitch)	144-TQFP (20x20mm, 0.5mm pitch)	256-caBGA (14x14mm, 0.8mm pitch)	256-ftBGA (17x17mm, 1.0mm pitch)	332-caBGA (17x17mm, 0.8mil pitch)	484-fpBGA (23x23mm, 1.0mm pitch)
LCMXO2-7000ZE							CDM>1kV Class IV	CDM>1kV Class IV	CDM>1kV Class IV	CDM>1kV Class IV	CDM>1kV Class IV
LCMXO2-4000ZE						CDM>900V Class III	CDM>900V Class III	CDM>900V Class III	CDM>1kV Class IV	CDM>750V Class III	CDM>750V Class III
LCMXO2-2000ZE			CDM >1kV Class C3		CDM>1kV Class IV	CDM>1kV Class IV	CDM>1kV Class IV	CDM>1kV Class IV	CDM>1kV Class IV		
LCMXO2-1200ZE	CDM>1kV Class IV QBS				CDM>1kV Class IV	CDM>1kV Class IV	CDM>1kV Class IV				
LCMXO2-640ZE					CDM>1kV Class IV	CDM>1kV Class IV					
LCMXO2-256ZE		CDM>1kV Class IV		CDM>1kV Class IV	CDM>1kV Class IV	CDM>1kV Class IV					

CDM classification for Commercial/Industrial products, per JESD22-C101 and JS-002-2014.

All CDM levels indicated are dual-polarity (\pm)

Qualification-by-Similarity (QBS) CDM uses the smallest package for a given product because the lowest package parasitics have the worst-case performance. All larger packages for a given product are qualified-by-similarity (QBS).

Table 3.4.2 MachXO2 ESD-CDM Data (continued) – LCMXO2-2000ZE 49WLCSP CSR Data

CDM Voltage Level	Lot #1			Lot #2			Lot #3		
	Unit #1	Unit #2	Unit #3	Unit #1	Unit #2	Unit #3	Unit #1	Unit #2	Unit #3
1000 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
750 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
500 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
450 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
400 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
350 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
300 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
250 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
200 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
125 V	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS

Table 3.4.2 MachXO2 ESD-CDM Data (continued)

Product	32-QFN (5x5mm, 0.5mm pitch)	64-ucBGA (4x4mm, 0.4mm pitch)	100-TQFP (14x14mm, 0.5mm pitch)	132-csBGA (8x8mm, 0.5mm pitch)	144-TQFP (20x20mm, 0.5mm pitch)	184-csBGA (8x8mm, 0.5mm pitch)	256-caBGA (14x14mm, 0.8mm pitch)	256-ftBGA (17x17mm, 1.0mm pitch)	332-caBGA (17x17mm, 0.8mil pitch)	484-fpBGA (23x23mm, 1.0mm pitch)
LCMXO2-7000HC/HE					CDM>1kV Class IV		CDM>1kV Class IV	CDM>1kV Class IV	CDM>1kV Class IV	CDM>1kV Class IV
LCMXO2-4000HC/HE/ 2000UHC/UHE				CDM>800V Class III	CDM>800V Class III	CDM>800V Class III QBS	CDM>800V Class III	CDM>900V Class III	CDM>800V Class III	CDM>1kV Class IV
LCMXO2-2000HC/HE/ 1200UHC			CDM>1kV Class IV	CDM>1kV Class IV	CDM>1kV Class IV		CDM>1kV Class IV	CDM>1kV Class IV		
LCMXO2-1200HC/640UHC			CDM>1kV Class IV	CDM>1kV Class IV	CDM>1kV Class IV					
LCMXO2-640HC			CDM>1kV Class IV	CDM>1kV Class IV						
LCMXO2-256HC	CDM>1kV Class IV	CDM>1kV Class IV	CDM>1kV Class IV	CDM>1kV Class IV						

CDM classification for Commercial/Industrial products, per JESD22-C101
 All CDM levels indicated are dual-polarity (±)

Qualification-by-Similarity (QBS) CDM uses the smallest package for a given product because the lowest package parasitics have the worst-case performance. All larger packages for a given product are qualified-by-similarity (QBS).

Latch-Up:

MachXO2 product family was tested per the JEDEC EIA/JESD78 IC Latch-up Test procedure and Lattice Procedure # 101570.

All units were Class tested at room ambient prior to reliability stress and after reliability stress. No failures were observed within the passing classification.

Table 3.4.3 MachXO2 I/O Latch Up >100mA @ HOT (105°C) Data

Product	25-WLCSP (2.5x2.5m, 0.4mm pitch)	32-QFN (5x5mm, 0.5mm pitch)	49-WLCSP (3.2x3.2m m0.4mm pitch)	64-ucBGA (4x4mm, 0.4mm pitch)	100-TQFP (14x14mm, 0.5mm pitch)	132- csBGA (8x8mm, 0.5mm pitch)	144-TQFP (20x20mm, 0.5mm pitch)	184- csBGA (8x8mm, 0.5mm pitch)	256- caBGA (14x14mm, 0.8mm pitch)	256-ftBGA (17x17mm, 1.0mm pitch)	332-caBGA (17x17mm, 0.8mil pitch)	484-fpBGA (23x23mm, 1.0mm pitch)
LCMXO2-7000							> +/-100mA Class II Level A		> +/-100mA Class II Level A	> +/-100mA Class II Level A	> +/-100mA Class II Level A	> +/-100mA Class II Level A
LCMXO2-4000/2000U/ 2000ZE			> +/- 100mA Class II Level A			> +/- 100mA Class II Level A	> +/-100mA Class II Level A	> +/- 100mA Class II Level A QBS	> +/-100mA Class II Level A	> +/-100mA Class II Level A	> +/-100mA Class II Level A	> +/-100mA Class II Level A
LCMXO2-2000/1200U			> +/- 100mA Class II Level A QBS		> +/-100mA Class II Level A	> +/- 100mA Class II Level A	> +/-100mA Class II Level A		> +/-100mA Class II Level A	> +/-100mA Class II Level A		
LCMXO2-1200/640U	> +/- 100mA Class II Level A QBS				> +/-100mA Class II Level A	Class II Level A QBS	> +/-100mA Class II Level A					
LCMXO2-640					> +/-100mA Class II Level A	> +/- 100mA Class II Level A						
LCMXO2-256		> +/- 100mA Class II Level A		Class II Level A QBS	Class II Level A QBS	> +/- 100mA Class II Level A						

IO-LU classification for Commercial/Industrial products, per JESD78

All IO-LU levels indicated are dual-polarity (±)

Qualification-by-Similarity (QBS) IO-LU uses the smallest package for a given product because the lowest package parasitics have the worst-case performance. All larger packages for a given product are qualified-by-similarity (QBS).

Table 3.4.4 MachXO2 Vcc Latch Up >1.5X @ HOT (105°C) Data

Product	25-WLCSP (2.5x2.5mm, 0.4mm pitch)	32-QFN (5x5mm, 0.5mm pitch)	49-WLCSP (3.2x3.2mm 0.4mm pitch)	64-ucBGA (4x4mm, 0.4mm pitch)	100-TQFP (14x14mm, 0.5mm pitch)	132- csBGA (8x8mm, 0.5mm pitch)	144-TQFP (20x20mm, 0.5mm pitch)	184- csBGA (8x8mm, 0.5mm pitch)	256-caBGA (14x14mm, 0.8mm pitch)	256-ftBGA (17x17mm, 1.0mm pitch)	332-caBGA (17x17mm, 0.8mil pitch)	484-fpBGA (23x23mm, 1.0mm pitch)
LCMXO2-7000							> 1.5x Vcc Class II		> 1.5x Vcc Class II	> 1.5x Vcc Class II	> 1.5x Vcc Class II	> 1.5x Vcc Class II
LCMXO2-4000/2000U						> 1.5x Vcc Class II	> 1.5x Vcc Class II	> 1.5x Vcc Class II QBS	> 1.5x Vcc Class II	> 1.5x Vcc Class II	> 1.5x Vcc Class II	> 1.5x Vcc Class II
LCMXO2-2000/1200U/ 2000ZE			1.5x Vcc Class II		> 1.5x Vcc Class II	> 1.5x Vcc Class II	> 1.5x Vcc Class II		> 1.5x Vcc Class II	> 1.5x Vcc Class II		
LCMXO2-1200/640U	> 1.5x Vcc Class II QBS				> 1.5x Vcc Class II	Class II QBS	> 1.5x Vcc Class II					
LCMXO2-640					> 1.5x Vcc Class II	> 1.5x Vcc Class II						
LCMXO2-256		> 1.5x Vcc Class II		Class II QBS	Class II QBS	> 1.5x Vcc Class II						

IO-LU classification for Commercial/Industrial products, per JESD78

All IO-LU levels indicated are dual-polarity (±)

Qualification-by-Similarity (QBS) IO-LU uses the smallest package for a given product because the lowest package parasitics have the worst-case performance. All larger packages for a given product are qualified-by-similarity (QBS).

4.0 PACKAGE QUALIFICATION DATA FOR MACHXO2 PRODUCT FAMILY

The MachXO2 product family is offered in TQFP, uc/cs/ca/ftBGA, fpBGA, QFN and WLCSP packages assembled and tested at ASEM in Malaysia, ASET in Kaohsiung, ASEK in Kaohsiung, Taiwan, ATT in Hsinchu, Taiwan, and UTAC/ NEPES in Singapore. This report details the package qualification results of the initial MachXO2 product introductions. Package qualification tests include Surface Mount Pre-Conditioning (SMPC), Temperature Cycling (T/C), Un-biased HAST (UHAST), Biased HAST (BHAST) and High Temperature Storage (HTSL). Mechanical evaluation tests include Scanning Acoustic Tomography (SAT) and visual package inspection. SMPC is used prior to all other package stresses.

The generation and use of generic data applied across a family of packages emanating from one base assembly process is a Family Qualification, or Qualification-by-Similarity. For the package stresses BHAST, UHAST and HTSL, these are considered generic for a given Package Technology. T/C is considered generic up to an evaluated die size + package size + 10%, for a given Package Technology. Surface Mount Pre-Conditioning (SMPC) is considered generic up to an evaluated Peak Reflow temperature, for a given Package Technology. The following table demonstrates the package stresses qualification matrix.

Table 4.0.1 Product-Package Qualification-By-Similarity Matrix

Product-Package Combinations	Stress Test	Advanced Semiconductor Engineering, Malaysia (ASEM)													
		ASET		32-QFN (5x5mm, 0.5mm pitch)	48-QFN (7x7mm, 0.5mm pitch)	84-QFN (7x7mm, 0.5mm pitch)	64-ucBGA (4x4mm, 0.4mm pitch)	100-TQFP (14x14mm, 0.5mm pitch)	132-csBGA (8x8mm, 0.5mm pitch)	144-TQFP (20x20mm, 0.5mm pitch)	184-csBGA (8x8mm, 0.5mm pitch)	256-caBGA (14x14mm, 0.8mm pitch)	256-ftBGA (17x17mm, 1.0mm pitch)	332-caBGA (17x17mm, 0.8mil pitch)	484-fpBGA (23x23mm, 1.0mm pitch)
LCMXO2-7000	SMPC	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	MSL3	Package not offered	2	2	MSL3	MSL3	
	T/C								1K cycles		2	2	1K cycles	1K cycles	
	BHAST								1		2	2	2	264 hours	
	UHAST								1		2	2	2	264 hours	
	HTSL								1		2	2	2	1K hours	
LCMXO2-4000/2000U	SMPC	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	2	1	MSL3	2	2	2	3	
	T/C							2	1	1K cycles	2	2	2	3	
	BHAST							2	1	264 hours	2	2	2	3	
	UHAST							2	1	2	2	2	2	3	
	HTSL							2	1	1K cycles	2	2	2	3	
LCMXO2-4000	SMPC	Package not offered	Package not offered	Package not offered	MSL3	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	
	T/C				700 cycles										
	BHAST				4										
	UHAST				96 hours										
	HTSL				4										
LCMXO2-2000/1200U	SMPC	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	1	2	1	Package not offered	2	2	Package not offered	Package not offered
	T/C							1	2	1		2	2		
	BHAST							1	2	1		2	2		
	UHAST							1	2	1		2	2		
	HTSL							1	2	1		2	2		
LCMXO2-1200	SMPC	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	
	T/C														MSL3
	BHAST														700 cycles
	UHAST														96 hours
	HTSL														N/A
LCMXO2-1200/640U	SMPC	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	1	MSL3	MSL3	Package not offered	Package not offered	Package not offered	Package not offered	
	T/C							1	1K cycles	1K cycles					
	BHAST							1	264 hours	264 hours					
	UHAST							1	264 hours	264 hours					
	HTSL							1	1K hours	1K hours					
LCMXO2-640	SMPC	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	1	2	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered	
	T/C							1	2						
	BHAST							1	2						
	UHAST							1	2						
	HTSL							1	2						
LCMXO2-256	SMPC	MSL3	Package not offered	4	Package not offered	MSL3	1	2	Package not offered	Package not offered	Package not offered	Package not offered	Package not offered		
	T/C	1K cycle		4		1K cycle	1	2							
	BHAST	96 hours		4		2	1	2							
	UHAST	N/A		4		2	1	2							
	HTSL	1K hours		4		1K hours	1	2							

Notes: 1, 2, 3 & 4 – Qualified-by-similarity (QBS) from one of the other product-packages within the same packaging technology

Table 4.02 WLCSP Package Qualification-By-Similarity Matrix

The LCMXO2-2000ZE, 49-WLCSP and LCMXO2-1200ZE, 25-WLCSP product/package combination is Qualified-by-Similarity (QBS) using the LCMXO3L/XO3LF-4300, 81-WLCSP qualification vehicle below.	Stress Tests	Amkor Technology Taiwan (ATT)			
		25-WLCSP (2.5x2.5mm, 0.4mm pitch)	49-WLCSP (3.2x3.2mm, 0.4mm pitch)	81-WLCSP (3.8x3.8mm, 0.4mm pitch)	
LCMXO3L/XO3LF-4300, 81-WLCSP (Lead WLCSP qual vehicle)	SMPC			MSL1	
	T/C-B			700 cycles	
	UHAST			264 hours	
	HTSL			1000 hours	
	Slow-TC			1000 cycles	
	Bend			20,000 bends	
	Drop			30 drops	
LCMXO2-2000ZE, 49-WLCSP (Package is qualified-by-similarity to the LCMXO3L/XO3LF-4300, 81-WLCSP)	SMPC		MSL1		
	T/C-B				1000 cycles
	THB				1000 hours
	UHAST				96 hours
	HTSL				1000 hours
	Slow-TC				
	Bend		QBS		
	Drop				
LCMXO2-1200ZE, 25-WLCSP (Package is qualified-by-similarity to the LCMXO3L/XO3LF-4300, 81-WLCSP)	SMPC	MSL1			
	T/C-B	700 cycles			
	BHAST	96 hours			
	UHAST	96 hours			
	HTSL	1000 hours			
	Slow-TC	QBS			
	Bend				
Drop					

4.1 MachXO2 Product Family Surface Mount Preconditioning Testing: SMPC

The Surface Mount Preconditioning (SMPC) Test is used to model the surface mount assembly conditions during component solder processing. All devices stressed through Temperature Cycling, Un-biased HAST and Biased HAST were preconditioned. This preconditioning is consistent with JEDEC JESD22-A113 “Preconditioning Procedures of Plastic Surface Mount Devices Prior to Reliability Testing”, Moisture Sensitivity Level 3 (MSL3 or MSL1, as applicable) package moisture sensitivity and dry-pack storage requirements.

Surface Mount Preconditioning (MSL3)

(5 Temperature Cycles, 24 hours bake @ 125°C, 30°C/60% RH, soak 192 hours, 260°C Reflow Simulation, 3 passes) performed before all package tests.

MSL3 Packages: TQFP, µcBGA, csBGA, caBGA, ftBGA, fpBGA and QFN

Surface Mount Preconditioning (MSL1)

(5 Temperature Cycles, 24 hours bake @ 125°C, 85°C/85% RH, soak 168 hours, 260°C Reflow Simulation, 3 passes) performed before all package tests.

MSL1 Packages: WLCSP

Method: Lattice Procedure # 103467, J-STD-020 and JESD22-A113

Table 4.1.1 Surface Mount Precondition Data

Product Name	Package	Assembly Site	Lot Number	Quantity	# of Fails	Reflow Temperature
LCMXO2-256	32QFN	ASET	Lot #1	245**	0	260°C
LCMXO2-256	32QFN	ASET	Lot #2	246	0	260°C
LCMXO2-256	32QFN	ASET	Lot #3	246	0	260°C
LCMXO2-256	64ucBGA	ASEM	Lot #1	169	0	260°C
LCMXO2-256	64ucBGA	ASEM	Lot #2	169	0	260°C
LCMXO2-640	48QFN	ASEM	Lot #1	175	0	260°C
LCMXO2-640	48QFN	ASEM	Lot #2	175	0	260°C
LCMXO2-640	48QFN	ASEM	Lot #3	175	0	260°C
LCMXO2-1200	32QFN	ASEM	Lot #1	265	0	260°C
LCMXO2-1200	32QFN	ASEM	Lot #2	265	0	260°C
LCMXO2-1200	32QFN	ASEM	Lot #3	265	0	260°C
LCMXO2-1200	132csBGA	ASEM	Lot #1	308	0	260°C
LCMXO2-1200	132csBGA	ASEM	Lot #2	308	0	260°C
LCMXO2-1200	132csBGA	ASEM	Lot #3	308	0	260°C
LCMXO2-4000	84QFN	ASEM	Lot #1	265	0	260°C
LCMXO2-4000	84QFN	ASEM	Lot #2	264***	0	260°C
LCMXO2-4000	84QFN	ASEM	Lot #3	265	0	260°C
LCMXO2-4000	184csBGA	ASEM	Lot #1	255	0	260°C
LCMXO2-4000	184csBGA	ASEM	Lot #2	255	0	260°C
LCMXO2-4000	184csBGA	ASEM	Lot #3	255	0	260°C
LCMXO2-4000	184csBGA	ASEM	Lot #4	80	0	260°C
LCMXO2-4000	184csBGA	ASEM	Lot #5	80	0	260°C
LCMXO2-7000	332caBGA	ASEM	Lot #1	77	0	260°C
LCMXO2-7000	332caBGA	ASEM	Lot #2	77	0	260°C
LCMXO2-1200/640U	144TQFP	ASEM	Lot #1	308	0	260°C
LCMXO2-1200/640U	144TQFP	ASEM	Lot #2	308	0	260°C
LCMXO2-1200/640U	144TQFP	ASEM	Lot #3	308	0	260°C
LCMXO2-7000	144TQFP	ASEM	Lot #1	77	0	260°C
LCMXO2-7000	144TQFP	ASEM	Lot #2	77	0	260°C
LCMXO2-7000	484fpBGA	ASEM	Lot #1	307*	0	250°C
LCMXO2-7000	484fpBGA	ASEM	Lot #2	306*	0	250°C
LCMXO2-7000	484fpBGA	ASEM	Lot #3	305*	0	250°C
LCMXO3LF-4300	81WLCSP	ATT	Lot #1	164	0	260°C
LCMXO3LF-4300	81WLCSP	ATT	Lot #2	164	0	260°C
LCMXO3LF-4300	81WLCSP	ATT	Lot #3	163	0	260°C

Product Name	Package	Assembly Site	Lot Number	Quantity	# of Fails	Reflow Temperature
LCMXO2-1200ZE	25WLCSP	ATT	Lot #1	269**	0	260°C
LCMXO2-1200ZE	25WLCSP	ATT	Lot #1	450	0	260°C
LCMXO2-1200ZE	25WLCSP	ATT	Lot #2	450	0	260°C
LCMXO2-1200ZE	25WLCSP	ATT	Lot #3	450	0	260°C
LCMXO2-2000ZE	49WLCSP	ATT	Lot #1	308	0	260°C
LCMXO2-2000ZE	49WLCSP	ATT	Lot #2	308	0	260°C
LCMXO2-2000ZE	49WLCSP	ATT	Lot #3	308	0	260°C
LCMXO2-2000ZE	49WLCSP	ASEK	Lot #1	308	0	260°C
LCMXO2-2000ZE	49WLCSP	ASEK	Lot #2	308	0	260°C
LCMXO2-2000ZE	49WLCSP	ASEK	Lot #3	308	0	260°C

* 6 units had 1 corner solder ball knocked off due to handling damage. Sample size reduced accordingly for each of three assembly lots.

** 1 unit failed for "package damage" due to handling damage. Sample size reduced by one.

*** 1 unit failed with random silicon defect. Failure is unrelated to stress and sample size reduced by one.

MachXO2 Cumulative SMPC Failure Rate = 0 / 11,146

4.2 MachXO2 Product Family Temperature Cycling Data: T.C

The Temperature Cycling test is used to accelerate those failures resulting from mechanical stresses induced by differential thermal expansion of adjacent films, layers and metallurgical interfaces in the die and package. Devices are tested at 25°C after exposure to repeated cycling between -55°C and +125°C in an air environment consistent with JEDEC JESD22-A104 “Temperature Cycling”, Condition B temperature cycling requirements. Prior to Temperature Cycling testing, all devices are subjected to Surface Mount Preconditioning.

MSL3 Packages: TQFP, csBGA, QFN

MSL1 Packages: WLCSP

Stress Duration: 500, 700, 1000 cycles

Stress Conditions: Temperature cycling between -55°C to 125°C

Method: Lattice Procedure # 101568 and JESD22-A104, Condition B

Table 4.2.1 Temperature Cycling Data

Product Name	Package	Assembly Site	Lot Number	Quantity	500 Cycles	700 Cycles	1000 Cycles
LCMXO2-256	32QFN	ASET	Lot #1	82	0	N/A	0
LCMXO2-256	32QFN	ASET	Lot #2	82	0	N/A	0
LCMXO2-256	32QFN	ASET	Lot #3	82	0	N/A	0
LCMXO2-256	64ucBGA	ASEM	Lot #1	80	0	N/A	0
LCMXO2-256	64ucBGA	ASEM	Lot #2	78	0	N/A	0
LCMXO2-640	48QFN	ASEM	Lot #1	80	N/A	0	0
LCMXO2-640	48QFN	ASEM	Lot #2	80	N/A	0	0
LCMXO2-640	48QFN	ASEM	Lot #3	80	N/A	0	0
LCMXO2-1200	32QFN	ASEM	Lot #1	80	N/A	0	0
LCMXO2-1200	32QFN	ASEM	Lot #2	80	N/A	0	0
LCMXO2-1200	32QFN	ASEM	Lot #3	80	N/A	0	0
LCMXO2-1200	132csBGA	ASEM	Lot #1	77	0	N/A	0
LCMXO2-1200	132csBGA	ASEM	Lot #2	77	0	N/A	0
LCMXO2-1200	132csBGA	ASEM	Lot #3	77	0	N/A	0
LCMXO2-4000	84QFN	ASEM	Lot #1	75	N/A	0	0
LCMXO2-4000	84QFN	ASEM	Lot #2	75	N/A	0	0
LCMXO2-4000	84QFN	ASEM	Lot #3	75	N/A	0	0
LCMXO2-4000	184csBGA	ASEM	Lot #1	78	0	N/A	0
LCMXO2-4000	184csBGA	ASEM	Lot #2	78	0	N/A	0
LCMXO2-4000	184csBGA	ASEM	Lot #3	78	0	N/A	0
LCMXO2-7000	332caBGA	ASEM	Lot #1	77	0	N/A	0
LCMXO2-7000	332caBGA	ASEM	Lot #2	77	0	N/A	0
LCMXO2-1200/640U	144TQFP	ASEM	Lot #1	77	0	N/A	0
LCMXO2-1200/640U	144TQFP	ASEM	Lot #2	77	0	N/A	0
LCMXO2-1200/640U	144TQFP	ASEM	Lot #3	76*	0	N/A	0

Product Name	Package	Assembly Site	Lot Number	Quantity	500 Cycles	700 Cycles	1000 Cycles
LCMXO2-7000	144TQFP	ASEM	Lot #1	77	0	N/A	0
LCMXO2-7000	144TQFP	ASEM	Lot #2	77	0	N/A	0
LCMXO2-7000	484fpBGA	ASEM	Lot #1	76**	0	N/A	0
LCMXO2-7000	484fpBGA	ASEM	Lot #2	76	0	N/A	0
LCMXO2-7000	484fpBGA	ASEM	Lot #3	75**	0	N/A	0
LCMXO3LF-4300	81-WLCSP	ATT	Lot #1	77	N/A	0	N/A
LCMXO3LF-4300	81-WLCSP	ATT	Lot #2	77	N/A	0	N/A
LCMXO3LF-4300	81-WLCSP	ATT	Lot #3	77	N/A	0	N/A
LCMXO2-1200ZE	25-WLCSP	ATT	Lot #1	85	N/A	0	0
LCMXO2-1200ZE	25WLCSP	ATT	Lot #1	90	0	0	N/A
LCMXO2-1200ZE	25WLCSP	ATT	Lot #2	90	0	0	N/A
LCMXO2-1200ZE	25WLCSP	ATT	Lot #3	90	0	0	N/A
LCMXO2-2000ZE	49WLCSP	ATT	Lot #1	77	NA	0	0
LCMXO2-2000ZE	49WLCSP	ATT	Lot #2	77	NA	0	0
LCMXO2-2000ZE	49WLCSP	ATT	Lot #3	77	NA	0	0
LCMXO2-2000ZE	49WLCSP	ASEK	Lot #1	77	NA	0	0
LCMXO2-2000ZE	49WLCSP	ASEK	Lot #2	77	NA	0	0
LCMXO2-2000ZE	49WLCSP	ASEK	Lot #3	77	NA	0	0

* 1 unit had a broken lead due to handling damage. Sample size reduced by one.

** 2 units had 1 corner solder ball knocked off due to handling damage. Sample size reduced by one for each of two assembly lots.

<i>MachXO2 Cumulative Temp Cycle Failure Rate = 0 / 3,387</i>

4.3 MachXO2 Product Family Unbiased HAST Data: uHAST

Unbiased Highly Accelerated Stress Test (HAST) testing uses both pressure and temperature to accelerate penetration of moisture into the package and to the die surface. The Unbiased HAST test is designed to detect ionic contaminants present within the package or on the die surface, which can cause chemical corrosion. Consistent with JEDEC JESD22-A118, “Accelerated Moisture Resistance - Unbiased HAST,” the Unbiased HAST conditions are either 96 hours exposure at 130°C and 85% relative humidity (Condition A), or 264 hours exposure at 110°C and 85% relative humidity (Condition B). Prior to Unbiased HAST testing, all devices are subjected to Surface Mount Preconditioning.

MSL3 Packages: TQFP, csBGA

MSL1 Packages: WLCSP

Stress Conditions/Duration: 110°C/85%RH for 264h or 130°C/85%RH for 96h

Method: Lattice Procedure # 104561 and JESD22-A118

Table 4.3.1 Unbiased HAST Data

Product Name	Package	Assembly Site	Lot Number	Quantity	# of Fails	Stress Temperature	Stress Duration
LCMXO2-640	48QFN	ASEM	Lot #1	85	0	130°C	96 Hrs
LCMXO2-640	48QFN	ASEM	Lot #2	85	0	130°C	96 Hrs
LCMXO2-640	48QFN	ASEM	Lot #3	85	0	130°C	96 Hrs
LCMXO2-1200	132csBGA	ASEM	Lot #1	77	0	110°C	264 Hrs
LCMXO2-1200	132csBGA	ASEM	Lot #2	77	0	110°C	264 Hrs
LCMXO2-1200	132csBGA	ASEM	Lot #3	77	0	110°C	264 Hrs
LCMXO2-1200/640U	144TQFP	ASEM	Lot #1	77	0	110°C	264 Hrs
LCMXO2-1200/640U	144TQFP	ASEM	Lot #2	77	0	110°C	264 Hrs
LCMXO2-1200/640U	144TQFP	ASEM	Lot #3	77	0	110°C	264 Hrs
LCMXO2-4000	84QFN	ASEM	Lot #1	85	0	130°C	96 Hrs
LCMXO2-4000	84QFN	ASEM	Lot #2	84	0	130°C	96 Hrs
LCMXO2-4000	84QFN	ASEM	Lot #3	85	0	130°C	96 Hrs
LCMXO2-7000	484fpBGA	ASEM	Lot #1	76	0	110°C	264 Hrs
LCMXO2-7000	484fpBGA	ASEM	Lot #2	77	0	110°C	264 Hrs
LCMXO2-7000	484fpBGA	ASEM	Lot #3	76	0	110°C	264 Hrs
LCMXO3LF-4300	81-WLCSP	ATT	Lot #1	77	0	110°C	264 Hrs
LCMXO3LF-4300	81-WLCSP	ATT	Lot #2	77	0	110°C	264 Hrs
LCMXO3LF-4300	81-WLCSP	ATT	Lot #3	77	0	110°C	264 Hrs

Product Name	Package	Assembly Site	Lot Number	Quantity	# of Fails	Stress Temperature	Stress Duration
LCMXO2-1200ZE	25-WLCSP	ATT	Lot #1	85	0	110°C	264 Hrs
LCMXO2-1200ZE	25WLCSP	ATT	Lot #1	89	0	130°C	96 Hrs
LCMXO2-1200ZE	25WLCSP	ATT	Lot #2	90	0	130°C	96 Hrs
LCMXO2-1200ZE	25WLCSP	ATT	Lot #3	90	0	130°C	96 Hrs
LCMXO2-2000ZE	49WLCSP	ATT	Lot #1	77	0	130°C	96 Hrs
LCMXO2-2000ZE	49WLCSP	ATT	Lot #2	77	0	130°C	96 Hrs
LCMXO2-2000ZE	49WLCSP	ATT	Lot #3	77	0	130°C	96 Hrs
LCMXO2-2000ZE	49WLCSP	ASEK	Lot #1	77	0	130°C	96 Hrs
LCMXO2-2000ZE	49WLCSP	ASEK	Lot #2	77	0	130°C	96 Hrs
LCMXO2-2000ZE	49WLCSP	ASEK	Lot #3	77	0	130°C	96 Hrs

MachXO2 Cumulative Unbiased HAST failure Rate = 0 / 2,247

4.4 MachXO2 Product Family Biased HAST Data: BHAST

Highly Accelerated Stress Test (HAST) testing uses both pressure and temperature to accelerate penetration of moisture into the package and to the die surface. The Biased HAST test is used to accelerate threshold shifts in the MOS device associated with moisture diffusion into the gate oxide region as well as electrochemical corrosion mechanisms within the device package. Consistent with JEDEC JESD22-A110 “Highly-Accelerated Temperature and Humidity Stress Test (HAST)”, the biased HAST conditions are either 96 hours exposure at 130°C and 85% relative humidity (Condition A), or 264 hours exposure at 110°C and 85% relative humidity (Condition B). Prior to Biased HAST testing, all devices are subjected to Surface Mount Preconditioning.

MSL3 Packages: TQFP, csBGA, QFN

MSL1 Packages: WLCSP

Stress Conditions/Duration: $V_{CC} = 1.26V / V_{CCIO} = 3.3V$

110°C/85%RH for 264h or 130°C/85%RH for 96h

Method: Lattice Procedure #101571 and JESD22-A110

Table 4.4.1 Biased HAST Data

Product Name	Package	Assembly Site	Lot Number	Quantity	# of Fails	Stress Temperature	Stress Duration
LCMXO2-256	32QFN	ASET	Lot #1	81*	0	130°C	96 Hrs
LCMXO2-256	32QFN	ASET	Lot #2	82	0	130°C	96 Hrs
LCMXO2-256	32QFN	ASET	Lot #3	82	0	130°C	96 Hrs
LCMXO2-1200	84QFN	ASEM	Lot #1	80	0	130C	96 Hrs
LCMXO2-1200	84QFN	ASEM	Lot #2	80	0	130C	96 Hrs
LCMXO2-1200	84QFN	ASEM	Lot #3	79**	0	130°C	96 Hrs
LCMXO2-1200	132csBGA	ASEM	Lot #1	45	0	110°C	264 Hrs
LCMXO2-1200	132csBGA	ASEM	Lot #2	45	0	110°C	264 Hrs
LCMXO2-1200	132csBGA	ASEM	Lot #3	77	0	110°C	264 Hrs
LCMXO2-4000	184csBGA	ASEM	Lot #3	85	0	110°C	264 Hrs
LCMXO2-4000	184csBGA	ASEM	Lot #4	80	0	110°C	264 Hrs
LCMXO2-4000	184csBGA	ASEM	Lot #5	80	0	110°C	264 Hrs
LCMXO2-1200/640U	144TQFP	ASEM	Lot #1	77	0	110°C	264 Hrs
LCMXO2-1200/640U	144TQFP	ASEM	Lot #2	45	0	110°C	264 Hrs
LCMXO2-1200/640U	144TQFP	ASEM	Lot #3	45	0	110°C	264 Hrs
LCMXO2-7000	484fpBGA	ASEM	Lot #1	77	0	110°C	264 Hrs
LCMXO2-7000	484fpBGA	ASEM	Lot #2	76	0	110°C	264 Hrs
LCMXO2-7000	484fpBGA	ASEM	Lot #3	76	0	110°C	264 Hrs

Product Name	Package	Assembly Site	Lot Number	Quantity	# of Fails	Stress Temperature	Stress Duration
LCMXO2-1200ZE	25WLCSP	ATT	Lot #1	90	0	130°C	96 Hrs
LCMXO2-1200ZE	25WLCSP	ATT	Lot #2	90	0	130°C	96 Hrs
LCMXO2-1200ZE	25WLCSP	ATT	Lot #3	90	0	130°C	96 Hrs

* 1 unit failed for “package damage” due to handling damage. Sample size reduced by one.

** 1 unit failed for “package damage” due to EOS. Sample size reduced by one.

MachXO2 Cumulative BHAST failure Rate = 0 / 1,562

4.5 MachXO2 Product Family Temperature Humidity Bias Data: THB

The THB test is used to accelerate threshold shifts in MOS devices associated with moisture diffusion into the gate oxide region as well as electrochemical corrosion mechanisms within the device package. This stress is consistent with JESD22-A101 “Steady State Temperature Humidity Bias Life Test” standard. The THB conditions are with supply rails biased at data sheet max operating and alternate pin biasing in an ambient of 85°C/85% relative humidity. Prior to THB testing, all devices are subjected to Surface Mount Preconditioning.

MSL1 Packages: WLCSP

Stress Conditions: Maximum Operating Supplies and 85°C/85%RH

Stress Duration: 500 hours, 1000 hours

Method: Lattice Procedure #101571 and JESD22-A101

Table 4.5.1 Temperature Humidity Bias Data:

Product Name	Package	Assembly Site	Lot Number	Quantity	# of Fails	500 Hrs Result	1000 Hrs Result	Cumulative Hours
LCMXO2-2000ZE	49WLCSP	ATT	Lot #1	77	0	0	0	77,000
LCMXO2-2000ZE	49WLCSP	ATT	Lot #2	77	0	0	0	77,000
LCMXO2-2000ZE	49WLCSP	ATT	Lot #3	77	0	0	0	77,000
LCMXO2-2000ZE	49WLCSP	ASEK	Lot #1	77	0	0	0	77,000
LCMXO2-2000ZE	49WLCSP	ASEK	Lot #2	77	0	0	0	77,000
LCMXO2-2000ZE	49WLCSP	ASEK	Lot #3	77	0	0	0	77,000

*MachXO2 Cumulative THB failure Rate = 0 / 462
MachXO2 Cumulative THB device hours = 462,000*

4.6 MachXO2 Product Family High Temperature Storage Life (HTSL)

The High Temperature Storage Life test is used to determine the effect of time and temperature, under storage conditions, for thermally activated failure mechanisms. Consistent with JEDEC JESD22-A103, the devices are subjected to high temperature storage Condition B: +150 (-0/+10) °C for 1000 hours. Prior to High Temperature Storage, all MachXO2 devices are subjected to Surface Mount Preconditioning as mentioned in Table 4.1.1. This is a relatively new requirement consistent with JESD47 for Pb-free, wirebonded packages.

MSL3 Packages: TQFP, csBGA, QFN, WLCSP

MSL1 Packages: WLCSP

Stress Duration: 168, 500, 1000, 1500 hours

Temperature: 150°C (ambient)

Method: Lattice Document # 101925 and JESD22-A103 / JESD22-A117

Table 4.6.1 MachXO2 High Temperature Storage Life Results

Product Name	Package	Assembly Site	Lot Number	Quantity	# of Fails	500 Hrs Result	1000 Hrs Result	1500 Hrs Result	Cumulative Hours
LCMXO2-256	32QFN	ASET	Lot #1	81**	0	0	0	N/A	81,000
LCMXO2-256	32QFN	ASET	Lot #2	82	0	0	0	N/A	82,000
LCMXO2-256	32QFN	ASET	Lot #3	82	0	0	0	N/A	82,000
LCMXO2-256	64ucBGA	ASEM	Lot #1	77	0	0	0	0	115,500
LCMXO2-256	64ucBGA	ASEM	Lot #2	80	0	0	0	0	120,000
LCMXO2-1200	84QFN	ASEM	Lot #1	85	0	N/A	0	0	127,500
LCMXO2-1200	84QFN	ASEM	Lot #2	81	0	N/A	0	0	121,500
LCMXO2-1200	84QFN	ASEM	Lot #3	79	0	N/A	0	0	118,500
LCMXO2-1200	132csBGA	ASEM	Lot #1	77	0	0	0	0	115,500
LCMXO2-1200	132csBGA	ASEM	Lot #2	77	0	0	0	0	115,500
LCMXO2-1200	132csBGA	ASEM	Lot #3	77	0	0	0	N/A	77,000
LXMXO2-4000	184csBGA	ASEM	Lot #1	80	0	0	0	0	120,000
LXMXO2-4000	184csBGA	ASEM	Lot #2	80	0	0	0	0	120,000
LXMXO2-4000	184csBGA	ASEM	Lot #3	80	0	0	0	0	120,000
LCMXO2-1200/640U	144TQFP	ASEM	Lot #1	77	0	0	0	0	115,500
LCMXO2-1200/640U	144TQFP	ASEM	Lot #2	77	0	0	0	N/A	77,000
LCMXO2-1200/640U	144TQFP	ASEM	Lot #3	77	0	0	0	N/A	77,000
LCMXO2-7000	484fpBGA	ASEM	Lot #1	76*	0	0	0	0	114,000
LCMXO2-7000	484fpBGA	ASEM	Lot #2	77	0	0	0	0	115,500
LCMXO2-7000	484fpBGA	ASEM	Lot #3	77	0	0	0	0	115,500
LCMXO3LF-4300	81-WLCSP	ATT	Lot #1	77	0	N/A	0	N/A	77,000
LCMXO3LF-4300	81-WLCSP	ATT	Lot #2	77	0	N/A	0	N/A	77,000
LCMXO3LF-4300	81-WLCSP	ATT	Lot #3	76	0	N/A	0	N/A	76,000

Product Name	Package	Assembly Site	Lot Number	Quantity	# of Fails	500 Hrs Result	1000 Hrs Result	1500 Hrs Result	Cumulative Hours
LCMXO2-1200ZE	25-WLCSP	ATT	Lot #1	85	0	0	0	0	127,500
LCMXO2-1200ZE	25WLCSP	ATT	Lot #1	89	0	0	0	N/A	89,000
LCMXO2-1200ZE	25WLCSP	ATT	Lot #2	90	0	0	0	N/A	90,000
LCMXO2-1200ZE	25WLCSP	ATT	Lot #3	90	0	0	0	N/A	90,000
LCMXO2-2000ZE	49WLCSP	ATT	Lot #1	77	0	0	0	N/A	77,000
LCMXO2-2000ZE	49WLCSP	ATT	Lot #2	77	0	0	0	N/A	77,000
LCMXO2-2000ZE	49WLCSP	ATT	Lot #3	77	0	0	0	N/A	77,000
LCMXO2-2000ZE	49WLCSP	ASEK	Lot #1	77	0	0	0	N/A	77,000
LCMXO2-2000ZE	49WLCSP	ASEK	Lot #2	77	0	0	0	N/A	77,000
LCMXO2-2000ZE	49WLCSP	ASEK	Lot #3	77	0	0	0	N/A	77,000

* 1 unit failed for "opens" due to handling damage. Sample size reduced by one.

** 1 unit failed for "opens" due to handling damage. Sample size reduced by one.

MachXO2 Cumulative HTSL failure Rate = 0 / 2,625
MachXO2 Cumulative HTSL device hours = 3,219,000

5.0 BOARD LEVEL RELIABILITY (BLR) STRESS METHODS

Reliability testing methods for surface mount electronic components in Wafer Level Chip Scale Packaging (WL CSP) assembled onto printed circuit boards (PCB) are focused on the stresses observed by the manufacturing and test processes and the applications associated with handheld electronic products. The handheld electronic products fit into the consumer and portable market segments with products such as cameras, calculators, cell phones, pagers, palm size PCs, PCMCIA cards, and the like.

Special daisy chain electronic components are constructed for board level reliability (BLR) testing to emulate as closely as possible, the design, material sets and assembly processes of the actual product being qualified.

BLR PCB test boards are designed per JEDEC JESD22-B111 requirements: 1mm thick board with 1+6+1 stack (8 layers) layup coated with OSP "Organic Surface Protection". Units are arranged in a 3x5 configuration on the board measuring 77mm x 132mm. One side provides VIP "Via-In-Pad" connections to the BGA and the flip side provides NVIP "No-VIP" (surface-trace) connections. The design of pad to surface traces must avoid trace cracks. BGA balls mount to NSMD "Non Solder Mask Defined" pads on the PCB.

Board Level Slow-Temperature Cycling (the slowest speed BLR stress) is intended to evaluate and compare the PCB performance of surface mount electronics components in an environment that accelerates solder joint fatigue and creep for handheld electronic products and applications. Pass/fail event detection is accomplished using resistance measurements. All stress tests are performed in accordance with IPC-JEDEC9701 & JESD22-A104, condition G, soak mode 2. Repeated slow-temperature cycling of printed circuit boards from -40C to +125C, for up to 3,000 cycles. Handheld electronic products passing criteria is 1,000 cycles.

Board Level Cyclic Bend Test (the medium speed BLR stress) is intended to evaluate and compare the PCB performance of surface mount electronics components in an environment that accelerates various assembly and test operations and actual use conditions such as repeated key-presses in mobile phone during the life of the product for handheld electronic products and applications. Pass/fail event detection is accomplished using datalogging 'opens' detectors. All stress tests are performed in accordance with IPC-JEDEC9702 & JEDEC JESD22-B113. Repeated bending of printed circuit boards at 1 to 3 Hz cyclic frequency for up to 200,000 cycles with maximum cross-head displacement of 4 mm. Handheld electronic products passing criteria is 20,000 cycles.

Board Level Drop & Mechanical Shock (the instantaneous BLR stress) is intended to evaluate and compare PCB drop performance of surface mount electronic components for handheld electronic product applications in an accelerated test environment determine the compatibility of the component(s) to withstand moderately severe shocks as a result of suddenly applied forces or abrupt change in motion produced by handling,

transportation or field operation. Further, handheld electronic products are more prone to being dropped during their useful service life because of their size and weight. Pass/fail event detection is accomplished using datalogging 'opens' detectors. All stress tests are performed in accordance with IPC-JEDEC9703 & JEDEC JESD22-B111 (drop) and JESD-B104 (shock). Repeated drop testing of printed circuit boards at 1500g, 0.5 millisecond half-sine pulse and 2900g, 0.3 millisecond half-sine pulse for up to 1,000 drops. Handheld electronic products passing criteria is 30 drops.

All devices stressed through Board Level Reliability Slow-TC, Bend and Drop Testing were preconditioned. This preconditioning is consistent with JEDEC JESD22-A113F "Preconditioning Procedures of Plastic Surface Mount Devices Prior to Reliability Testing", Moisture Sensitivity Level 1 (MSL1) and 1x 260°C Solder Reflow.

Slow-TC 1st fail is >1,000 cycles = PASS

Bend testing did not fail after 20,000 cycles = PASS

Drop testing did not fail after 30 drops = PASS

Mechanical Shock testing 1st fail is >30 drops = PASS

Table 5.0.1 Slow-Temp Cycling, IPC-JEDEC9701 & JEDEC JESD22-A104 condition G, soak mode 2

Assembly Site	Package	Die Size (mm)	Ball Pitch (mm)	Temp Range (C) & Dwell time (min)	Cycles per hour	Sample Size	1 st Fail (Cycles)	N (63.2%) (Cycles)	% Fails @ *1k/3k Cycles
UTAC / NEPES	25-WLCSP	2.546 x 2.492	0.4	-40C to +125C & 7.5 min at each endpoint	1.2	100/lot x 3 lots	1,568	2,785	67.3%
ATT	81-WLCSP	3.8 x 3.8	0.4	-40C to +125C & 5 min at each endpoint	1.5	247/lot x 3 lots	N/A	N/A	*0

Table 5.0.2 Bend Testing, IPC-JEDEC9702 & JEDEC JESD22-B113A

Assembly Site	Package	Die Size (mm)	Ball Pitch (mm)	Cross-head Displacement & Strain	Frequency (Hz)	Sample Size	1 st Fail (Cycles)	N (63.2%) (Cycles)	% Fails @ 200k Cycles
UTAC / NEPES	25-WLCSP	2.546 x 2.492	0.4	4 mm & 1100 ppm strain tensile and compressive	1-3	36/lot x 3 lots	No fails	No fails	No fails
ATT	81-WLCSP	3.8 x 3.8	0.4	4 mm & 1100 ppm strain tensile and compressive	1-3	71/lot x 3 lots	98,000	N/A	7.0

Table 5.0.3 Drop & Mechanical Shock Testing, IPC-JEDEC9703 & JEDEC JESD22-B111 / JESD-B104C

Assembly Site	Package	Die Size	Ball Pitch (mm)	Drop & Shock Waveform	Sample Size	1 st Fail (Drops)	N (63.2%) (Drops)	% Fails @ 1000 Drops
UTAC / NEPES	25-WLCSP	2.546 x 2.492	0.4	1500 g, 0.5 ms half-sine pulse	96/lot x 3 lots VIP	No fails @ 30 drops	TBD	TBD
UTAC / NEPES	25-WLCSP	2.546 x 2.492	0.4	2900 g, 0.3 ms half-sine pulse	45/lot x 1 lots	644	N/A	2.2%
ATT	81-WLCSP	3.8 x 3.8	0.4	0.3 ms half-sine pulse	180/lot x 3 lots	257	N/A	16.1

6.0 MACHXO2 PROCESS WAFER LEVEL RELIABILITY (WLR)

Several key fabrication process related parameters affect the Reliability of the End-Product. These parameters are tested during the Development Phase of the Technology. Passing data (a 10yr lifetime at the reliability junction temperature) must be obtained for three lots minimum for each parameter before release to production. These parameters are:

Hot Carrier Immunity (HCI): Effect is a reduction in transistor I_{dsat} . Worst case is low temperature.

Time Dependent Dielectric Breakdown (TDDB): Transistor and capacitor oxide shorts or leakage.

Negative Bias Temperature Instability (NBTI): Symptom is a shift in V_{th} (also a reduction in I_{dsat}).

Electromigration Lifetime (EML): Symptom is opens within, or shorts between, metal conductors.

Stress Migration (SM): Symptom is a void (open) in a metal Via due to microvoid coalescence.

Table 6.0.1 Wafer Level Reliability (WLR) Results

HCI	Device	LVN	LVP	MVN	MVP	HVN	HVP
	delta I_{ds}	-10%	-10%	-10%	-10%	-10%	-10%
	Celsius	25	25	25	25	25	25
	Vgstress	Vd/2	Vd	Vd/2	Vd	Vd/2	Vd
	Vds	1.26	-1.26	3.465	-3.465	5.25	-5.25
	TTF	3 lots>34yr DC	3 lots>71yr	3 lots>20yr AC	3 lots>684yr	3 lots >3.5e6 s DC*	3 lots >1e9 s DC*

TDDB	Device	LVN	LVP	MVN	MVP	HVN	HVP	Intermediate IMD	Semi-Global IMD
	Celsius	100	100	100	100	100	100	100	100
	Vg	1.26	-1.26	3.465	-3.465	5.25	-5.25	3.465	3.465
	Max Area	2.2 cm ²	22 cm ²	1 cm ²	2.5 cm ²	5e-4 cm ²	5e-4 cm ²	L/S=100nm	L/S=200nm
	0.1% TTF	3 lots>2.5e5 yr	3 lots>1.4e3 yr	3 lots>25yr	3 lots>390 yr	3 lots>1.2e3 yr	3 lots>20 yr	3 lots>229yr	3 lots>6690yr

NBTI	Device	LVP	MVP
	delta V_{th}	50mv	100mv
	Celsius	100	100
	Vg	-1.26	-3.465
	TTF	3 lots>5.8e5 yr	3 lots>4.2e3 yr

EML	Device	Intermediate	Semi-Global	Global	Top AI
	Celsius	100	100	100	100
	delta R	+5%	+5%	+5%	+5%
	Jmax	6.65E+05	6.65E+05	6.65E+05	2.85E+05
	0.1% TTF	3 lots>380 yr	3 lots>77 yr	3 lots>22 yr	3 lots>70yr

SM	Device	Intermediate	Semi-Global	Global
	delta R	+100%	+100%	+100%
	Celsius	100	100	100
	TTF	3 lots>2400 yr	3 lots>328 yr	3 lots>1.1e4 yr

Note: Reliability life times are based on listed temperature and use conditions. A Detailed WLR report is available upon request. Lattice Semiconductor Corporation document #106883.

7.0 MACHXO2 SOFT ERROR RATE DATA

Soft Error Rate (SER) testing is conducted to characterize the sensitivity of SRAM storage and device logic elements to High Energy Neutron and Alpha Particle radiation. Charge induced by the impact of these particles can collect at sensitive nodes in the device, and result in changes in the internal electrical states of the device. While these changes do not cause physical damage to the device, they can cause a logical error in device operation.

Neutron SRAM SER Rate – This characteristic is the rate of upset of Configuration RAM and Embedded Block RAM (EBR) cells during neutron testing. Devices were configured with a logic pattern, exposed to measured neutron doses, and the device configuration was read back from the device. Changed bits are identified through pattern comparison. Neutron testing is normalized to the published neutron flux rate for New York City at sea level. This rate is measured as Failures in Time (FITs) normalized per million bits in the device to allow for translation across the device families densities.

Alpha SRAM SER Rate – This characteristic is the rate of upset of Configuration RAM and Embedded Block RAM (EBR) cells during Alpha particle testing. Devices were configured with a logic pattern, exposed for a fixed time period to a calibrated Alpha particle source, and the device configuration was read back from the device. Changed bits are identified through pattern comparison. Alpha particle testing is normalized to a background rate of 0.001Alpha/cm²-hr based on characterization of packaging materials. This rate is measured at Failures in Time (FITs) normalized per million bits in the device to allow for translation across the device families densities as Failures in Time (FITs) normalized per million bits in the device to allow for translation across the device families densities.

All testing conforms to JEDEC JESD-89.

Table 7.0.1 MachXO2 MEASURED FITs / Mb

Stress / Structure	SRAM Type	MachXO2 Measured Fuses	Failures in Time per Megabit (FITs/Mb)
High Energy Neutron	Configuration RAM	359,640	363
	* EBR	73,728	611
Alpha Particle	Configuration RAM	359,640	128
	* EBR	73,728	363

* The EBR SER data was taken on the ECP3. The ECP3 shares the same base technology and SRAM cell.

Note: Detailed MachXO2 and ECP3 SER reports are available upon request. Lattice Semiconductor Corporation documents #106920 and #106669 respectively.

8.0 MACHXO2 ADDITIONAL FAMILY DATA

Table 8.0.1 MachXO2 Package Assembly Data – BGA, WLCSP, QFN & TQFP

Package Attributes / Assembly Sites	UTAC / NEPES	ASET	ATT	ASEK	ASEM	ASEM	ASEM	ASEM
Die Family (Product Line)	LCMXO2	LCMXO2	LCMXO2	LCMXO2	LCMXO2	LCMXO2	LCMXO2	LCMXO2
Fabrication Process Technology	65nm CMOS (CS200FL)	65nm CMOS (CS200FL)	65nm CMOS (CS200FL)	65nm CMOS (CS200FL)	65nm CMOS (CS200FL)	65nm CMOS (CS200FL)	65nm CMOS (CS200FL)	65nm CMOS (CS200FL)
Package Assembly Site	Singapore	Kaohsiung, Taiwan	Taiwan	Taiwan	Malaysia	Malaysia	Malaysia	Malaysia
Package Type	WLCSP	QFN	WLCSP	WLCSP	QFN	ucBGA, csBGA, caBGA & ftBGA	TQFP	fpBGA
Ball/Lead Counts	25	32	49	49	32, 48, 84	64, 132, 184, 256/332 & 256 respectively	100 & 144	484
Die Preparation / Singulation	wafer saw	wafer saw / full cut	Laser Groove + Step Cut	Laser Groove + Step Cut	wafer saw / full cut	wafer saw / full cut	wafer saw / full cut	wafer saw / full cut
Die Attach Material	n/a	Hitachi EN-4900F	n/a	n/a	Furukawa NEX130CTX/ CRM1076DS	Ablebond 2100A	Ablebond 3230	Ablebond 2100A
Mold Compound Supplier/ID	n/a	Sumitomo EME-G631H	n/a	n/a	Sumitomo G770SFL	Hitachi CEL9750ZHF10ALK U	Hitachi CEL9510HF 10	Hitachi 9750HF10 AKLU
Wire Bond Material	n/a	Gold (Au)	n/a	n/a	PCC	Gold (Au)	Gold (Au)	Gold (Au)
Wire Bond Methods	n/a	Thermosonic Ball	n/a	n/a	Thermosonic Ball	Thermosonic Ball	Thermosonic Ball	Thermosonic Ball
Substrate Material or Lead Frame	n/a	CU C194	n/a	n/a	???	Bismaleimide Triazine HL83X Series	n/a	Bismaleimide Triazine HL83X Series
Lead Finish Plating or BGA Ball	SAC405	Matte Sn	SAC305	SAC405	Matte Sn	SAC305	Matte Sn	SAC305
Marking	Laser	Laser	Laser	Laser	Laser	Laser	Laser	Laser



Lattice Semiconductor Corporation

5555 NE Moore Court
Hillsboro, Oregon 97124 U.S.A.
Telephone: (503) 268-8000
www.latticesemi.com

© 2019 Lattice Semiconductor Corp. All Lattice trademarks, registered trademarks, patents, and disclaimers are listed at www.latticesemi.com/legal. All other brand or product names are trademarks or registered trademarks of their respective holders. The specifications and information herein are subject to change without notice.

www.latticesemi.com